

# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1002  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,40  
 Seal(s): 15324976 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1002 0,80 / 15324976		2,02	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10
1002 1,00 / 15324973		2,23	120	1,40	0,05	2,50	0,10	4,30	0,10	4,20	0,10

Cable type code legend:

1002:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1002  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,18  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1002 0,80 / 15324976		2,02	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1002:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1003  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1003 0,80 / 15324973		2,33	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1003:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ECTFE, ETFE, PTFE, PUR, TFE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1003  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1003 0,80 / 15324973		2,33	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1003:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ECTFE, ETFE, PTFE, PUR, TFE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1005  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,60 - 2,40  
 Seal(s): 15324973 | 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50 / 15324976		1,74	80	1,25	0,05	2,45	0,10	4,20	0,10	4,20	0,10
1005 0,80 / 15324976		2,03	90	1,30	0,05	2,50	0,10	4,20	0,10	4,00	0,10
1005 1,00 / 15324973		2,23	120	1,40	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1005  
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,20  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80 / 15324976		2,03	90	1,30	0,05	2,50	0,10	4,20	0,10	4,00	0,10

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,80

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*



Cable Type codes: 1005  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 1,60 - 2,20  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50 / 15324976		1,74	80	1,25	0,05	2,45	0,10	4,20	0,10	4,20	0,10
1005 0,80 / 15324976		2,03	90	1,30	0,05	2,50	0,10	4,20	0,10	4,00	0,10

Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN

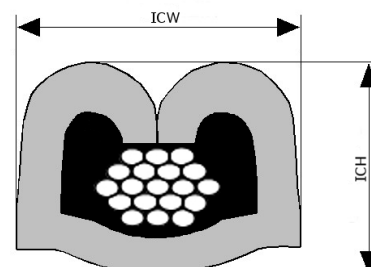

# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1007  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,70  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50 / 15324973		2,15	80	1,25	0,05	2,45	0,10	4,20	0,10	4,20	0,10
1007 0,80 / 15324973		2,33	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10
1007 1,00 / 15324973		2,58	120	1,40	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR





# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1007  
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80 / 15324973		2,33	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1007  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50 / 15324973		2,15	80	1,25	0,05	2,45	0,10	4,20	0,10	4,20	0,10
1007 0,80 / 15324973		2,33	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,51 | 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1009  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,30 - 3,05  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50 / 15324973		2,45	80	1,25	0,05	2,45	0,10	4,30	0,10	4,20	0,10
1009 0,51 / 15324973		2,45	80	1,25	0,05	2,45	0,10	4,30	0,10	4,20	0,10
1009 0,80 / 15324973		2,78	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1009  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,50 - 3,05  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,80 / 15324973		2,78	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1019  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,70 - 1,90  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1019 0,80 / 15324976		1,80	90	1,30	0,05	2,50	0,10	4,20	0,10	4,20	0,10

## Cable type code legend:

1019:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: THIN SPECIAL



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1025  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,40  
 Seal(s): 15324976 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,80 / 15324976		2,02	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10
1025 1,00 / 15324973		2,23	120	1,40	0,05	2,50	0,10	4,30	0,10	4,20	0,10

Cable type code legend:

1025:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1026  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,80 / 15324973		2,33	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1026:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: HDPE, PVC, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1026  
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,80 / 15324973		2,33	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1026:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: HDPE, PVC, XLPE  
 Insul. Wall Designator: REGULAR





# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1026  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,80 / 15324973		2,33	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1026:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: HDPE, PVC, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1035  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1035 0,50 / 15324973		2,15	80	1,25	0,05	2,45	0,10	4,20	0,10	4,20	0,10
1035 0,80 / 15324973		2,33	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

Cable type code legend:

1035:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*



Cable Type codes: 1035  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,30  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1035 0,50 / 15324973		2,15	80	1,25	0,05	2,45	0,10	4,20	0,10	4,20	0,10

## Cable type code legend:

1035:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: REGULAR

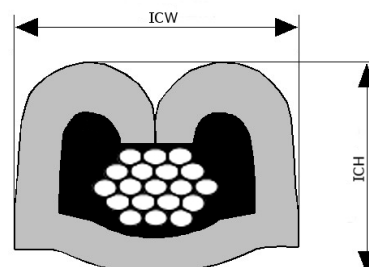

# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1035  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,30  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1035 0,50 / 15324973		2,15	80	1,25	0,05	2,45	0,10	4,20	0,10	4,20	0,10

## Cable type code legend:

1035:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1040  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,18  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1040 0,80 / 15324976		2,02	200	1,25	0,05	2,35	0,10	3,70	0,10	4,00	0,10

## Cable type code legend:

1040:

Industry Designator: SAE  
 Conductor Material: STAINLESS STEEL  
 Conductor Plating: NONE  
 Insul. Material: ECTFE, ETFE, PTFE, PUR, TFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1041  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1041 0,80 / 15324973		2,33	200	1,25	0,05	2,35	0,10	3,70	0,10	4,00	0,10

## Cable type code legend:

1041:

Industry Designator: SAE  
 Conductor Material: STAINLESS STEEL  
 Conductor Plating: NONE  
 Insul. Material: PTFE, TFE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1043  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1043 0,80 / 15324973		2,33	200	1,25	0,05	2,35	0,10	3,70	0,10	4,00	0,10

## Cable type code legend:

1043:

Industry Designator: SAE  
 Conductor Material: STEEL  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1051  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,40  
 Seal(s): 15324976 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1051 0,80 / 15324976		2,02	90	1,30	0,05	2,45	0,10	4,20	0,10	4,20	0,10
1051 1,00 / 15324973		2,23	120	1,40	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1051:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: THIN





# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1051  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,18  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1051 0,80 / 15324976		2,02	90	1,30	0,05	2,45	0,10	4,20	0,10	4,20	0,10

## Cable type code legend:

1051:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1056  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,40  
 Seal(s): 15324976 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1056 0,80 / 15324976		2,02	90	1,45	0,05	2,05	0,10	4,00	0,10	4,00	0,10
1056 1,00 / 15324973		2,23	120	1,40	0,05	2,50	0,10	4,30	0,10	4,20	0,10

Cable type code legend:

1056:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NI  
 Insul. Material: FLUORPOLYM, PTFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1061  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,18  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1061 0,80 / 15324976		2,02	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1061:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: AG  
 Insul. Material: PTFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1061  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,18  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1061 0,80 / 15324976		2,02	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1061:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: AG  
 Insul. Material: PTFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1066  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 0,00 - 0,00  
 Seal(s): 12084193

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1066 0,80 / 12084193		0,00	90	1,30	0,05	2,50	0,10	4,20	0,10	4,20	0,10

## Cable type code legend:

1066:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: NONE  
 Insul. Wall Designator: NONE



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1066  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 0,00 - 0,00  
 Seal(s): 12084193

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1066 0,80 / 12084193		0,00	90	1,30	0,05	2,50	0,10	4,20	0,10	4,20	0,10

## Cable type code legend:

1066:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: NONE  
 Insul. Wall Designator: NONE



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1069  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,09 - 2,25  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1069 1,00 / 15324973		2,17	120	1,40	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1069:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: ETFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1092  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,30  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1092 0,50 / 15324973		2,15	80	1,25	0,05	2,45	0,10	4,20	0,10	4,20	0,10

## Cable type code legend:

1092:

Industry Designator: SAE  
 Conductor Material: ALLOY  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: REGULAR





# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1092  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,30  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1092 0,50 / 15324973		2,15	80	1,25	0,05	2,45	0,10	4,20	0,10	4,20	0,10

## Cable type code legend:

1092:

Industry Designator: SAE  
 Conductor Material: ALLOY  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1092  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,30  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1092 0,50 / 15324973		2,15	80	1,25	0,05	2,45	0,10	4,20	0,10	4,20	0,10

## Cable type code legend:

1092:

Industry Designator: SAE  
 Conductor Material: ALLOY  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1094  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,35 - 2,50  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50 / 15324973		2,43	80	1,25	0,05	2,45	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1094:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: HEAVY DUTY



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1098  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,09 - 2,25  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1098 1,00 / 15324973		2,17	120	1,40	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

1098:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ETFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,75



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2003  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,10 - 2,50  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2003 0,75 / 15324973		2,30	90	1,30	0,05	2,40	0,10	4,50	0,10	4,10	0,10

## Cable type code legend:

2003: FL4G  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: EVA, PVC  
 Insul. Wall Designator: REGULAR

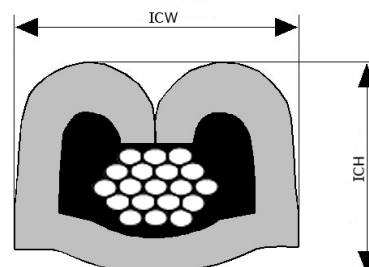

# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 1,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2004  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,41 - 2,60  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2004 1,50 / 15324973		2,51	160	1,50	0,05	2,50	0,10	4,70	0,10	4,20	0,10

## Cable type code legend:

2004: FLR41X-B  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: THIN

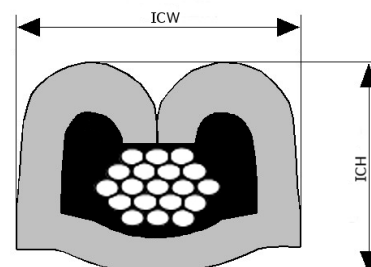

# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 1,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2004  
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED  
 Insulation Range  $\Phi$ [mm]: 2,41 - 2,60  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2004 1,50 / 15324973		2,51	160	1,50	0,05	2,50	0,10	4,70	0,10	4,20	0,10

## Cable type code legend:

2004: FLR41X-B  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: THIN

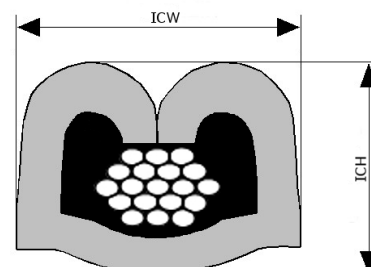

# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,75 | 1,00 | 1,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2005  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,40 - 2,60  
 Seal(s): 15324973 | 15324976 | 12052924

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2005 0,50 / 12052924		1,68	116	1,30	0,05	2,20	0,10	3,85	0,10	4,10	0,10
2005 0,75 / 15324976		1,93	85	1,30	0,05	2,45	0,10	4,40	0,10	4,10	0,10
2005 1,00 / 15324973		2,18	120	1,35	0,05	2,50	0,10	4,60	0,10	4,20	0,10
2005 1,50 / 15324973		2,40	160	1,50	0,05	2,50	0,10	4,70	0,10	4,20	0,10

## Cable type code legend:

2005: FLR2X (SAAB C)  
 Industry Designator: ISO  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, TPE, XLPE  
 Insul. Wall Designator: THIN

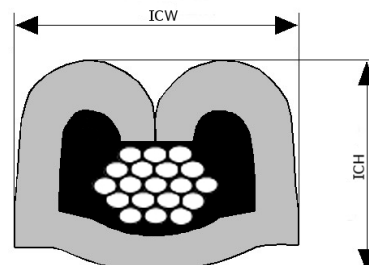



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 1,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2005  
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,60  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2005 1,50 / 15324973		2,40	160	1,50	0,05	2,50	0,10	4,70	0,10	4,20	0,10

## Cable type code legend:

2005: FLR2X (SAAB C)  
 Industry Designator: ISO  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, TPE, XLPE  
 Insul. Wall Designator: THIN

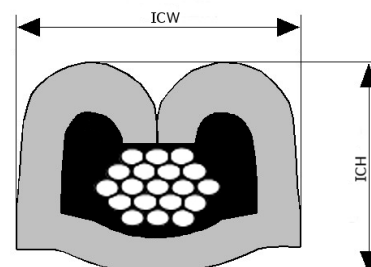

# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2006  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,50 - 2,71  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2006 1,00 / 15324973		2,61	120	1,35	0,05	2,50	0,10	4,60	0,10	4,20	0,10

## Cable type code legend:

2006:

Industry Designator: ISO  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: EPR, PVC, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,75 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2010  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,30 - 2,10  
 Seal(s): 15324974 | 15366060 | 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,50 / 15324974		1,50	80	1,30	0,05	1,90	0,10	3,90	0,10	4,10	0,10
2010 0,75 / 15324974		1,75	120	1,40	0,05	1,95	0,10	4,00	0,10	4,10	0,10
2010 1,00 / 15366060		1,95	160	1,50	0,05	1,95	0,10	3,40	0,10	4,05	0,10
2010 1,00 / 15324976		1,95	160	1,50	0,05	1,95	0,10	4,05	0,10	4,10	0,10

## Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

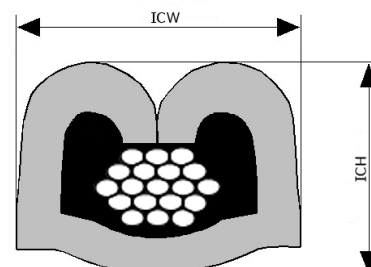

# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,75 | 1,00 | 1,30


*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2011  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,90  
 Seal(s): 15324973 | 12052924

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 0,50 / 15324973		2,15	75	1,20	0,05	2,10	0,10	4,10	0,10	4,20	0,10
2011 0,75 / 15324973		2,28	85	1,25	0,05	2,45	0,10	4,50	0,10	4,10	0,10
2011 1,00 / 12052924		2,54	208	1,50	0,05	2,20	0,10	4,15	0,10	4,15	0,10
2011 1,30 / 15324973		2,70	145	1,45	0,05	2,45	0,10	4,50	0,10	4,10	0,10

## Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: P/EST, PE, PVC, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,75


*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2017  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,60 - 1,90  
 Seal(s): 12089442

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,75 / 12089442		1,75	179	1,40	0,05	2,20	0,10	3,90	0,10	4,10	0,10

## Cable type code legend:

2017: FLR41X-B, FLRY-A  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PA, PP, PVC, XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,75 | 1,00



*This document is non-contractual  
 and for information only.*  
  
*For more information, please  
 consult your local sales office*

Cable Type codes: 2019  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,30 - 2,10  
 Seal(s): 15324974 | 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2019 0,50 / 15324974		1,50	80	1,30	0,05	2,25	0,10	3,85	0,10	4,10	0,10
2019 0,75 / 15324976		1,70	85	1,25	0,05	2,40	0,10	4,30	0,10	4,10	0,10
2019 1,00 / 15324976		1,95	80	1,50	0,05	2,25	0,10	4,05	0,10	4,15	0,10

## Cable type code legend:

2019: FL7Y 179, FLR7Y, FLR7Y-A, FLR7Y-B, FLU7Y  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: ETFE  
 Insul. Wall Designator: THIN

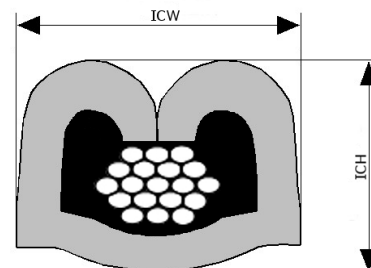

# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,75



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2023  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,50  
 Seal(s): 12052924

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2023 0,75 / 12052924		2,35	171	1,40	0,05	2,20	0,10	4,10	0,10	4,10	0,10

## Cable type code legend:

2023: FL2G  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: SIL, SIR  
 Insul. Wall Designator: REGULAR

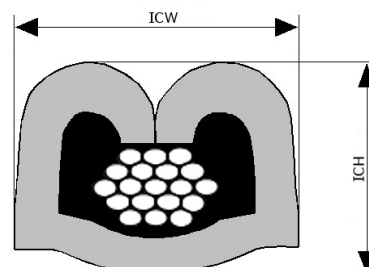

# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,75



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2036  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,40 - 2,70  
 Seal(s): 12052924 | 12089442

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2036 0,50 / 12089442		2,55	103	1,35	0,05	2,10	0,10	4,40	0,10	4,20	0,10
2036 0,75 / 12052924		2,55	175	1,40	0,05	2,20	0,10	4,15	0,10	4,15	0,10
2036 0,75 / 12089442		2,55	175	1,40	0,05	2,20	0,10	4,15	0,10	4,15	0,10

## Cable type code legend:

2036: FLY 157  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PUR, PVC  
 Insul. Wall Designator: REGULAR

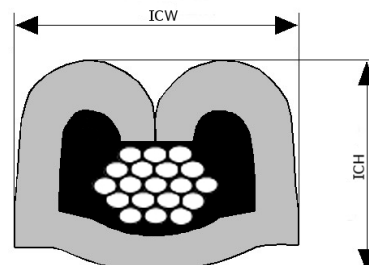



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 5002  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,10 - 2,18  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
5002 1,00 / 15324973		2,14	120	1,40	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

5002:

Industry Designator: UL  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: ETFE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,75 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 8000  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,70 - 2,10  
 Seal(s): 15324976 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 0,75 / 15324976		1,80	85	1,25	0,05	2,45	0,10	4,30	0,10	4,10	0,10
8000 1,00 / 15324973		2,00	120	1,35	0,05	2,45	0,10	4,50	0,10	4,10	0,10

Cable type code legend:

8000:

Industry Designator: N/G  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: SYNTHRESIN  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 9003  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,15 - 2,35  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,80 / 15324973		2,25	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

9003:

Industry Designator: N/G  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PVDF  
 Insul. Wall Designator: MIX



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 9003  
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]  
 Insulation Range  $\Phi$ [mm]: 2,15 - 2,35  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,80 / 15324973		2,25	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

9003:

Industry Designator: N/G  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PVDF  
 Insul. Wall Designator: MIX



# Crimp Information Sheet

Terminal Part Number: 12045773  
 Surface Plating: SN  
 Material Thickness [mm]: 0,38  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 9003  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,15 - 2,35  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,80 / 15324973		2,25	90	1,30	0,05	2,50	0,10	4,30	0,10	4,20	0,10

## Cable type code legend:

9003:

Industry Designator: N/G  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PVDF  
 Insul. Wall Designator: MIX

