

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1002
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,85 - 2,40
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1002 0,80 | | 2,02 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,60 | 0,10 |
| 1002 1,00 | | 2,23 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1002:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE
 Insul. Wall Designator: THIN

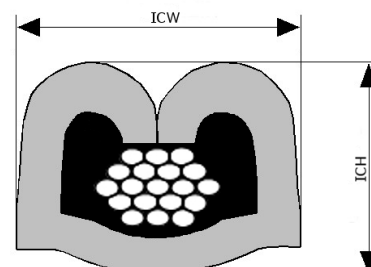

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1002
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
 Insulation Range Φ [mm]: 1,85 - 2,18
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1002 0,80 | | 2,02 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1002:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1002
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 1,85 - 2,40
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1002 0,80 | | 2,02 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,60 | 0,10 |
| 1002 1,00 | | 2,23 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1002:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1004
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,40 - 2,00
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1004 0,80 | | 1,55 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,70 | 0,10 |
| 1004 1,00 | | 1,75 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,70 | 0,10 |

Cable type code legend:

1004:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC
 Insul. Wall Designator: ULTRA THIN

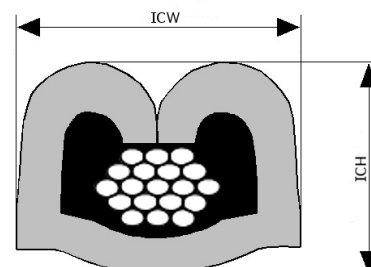

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50 | 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,60 - 2,40
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1005 0,50 | | 1,74 | 80 | 1,10 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,50 | 0,10 |
| 1005 0,80 | | 2,03 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,60 | 0,10 |
| 1005 1,00 | | 2,23 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1005
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
 Insulation Range Φ [mm]: 1,85 - 2,20
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1005 0,80 | | 2,03 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN

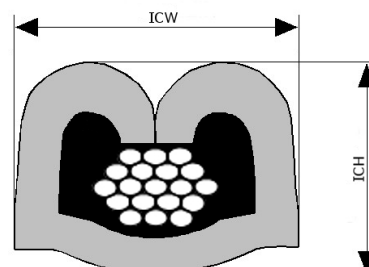

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50 | 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1005
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 1,60 - 2,40
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1005 0,50 | | 1,74 | 80 | 1,10 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,50 | 0,10 |
| 1005 0,80 | | 2,03 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,60 | 0,10 |
| 1005 1,00 | | 2,23 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN

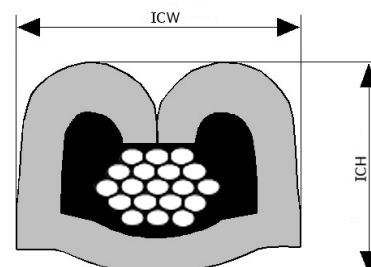

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1005 + 1005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1005 0,35 + 1005 0,35 | | 1,60 + 1,60 | 50 | 1,05 | 0,05 | 2,25 | 0,10 | 2,40 | 0,10 | 2,70 | 0,10 |
| 1005 0,50 + 1005 0,50 | | 1,74 + 1,74 | 109 | 1,25 | 0,05 | 2,05 | 0,10 | 2,35 | 0,10 | 2,70 | 0,10 |

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN

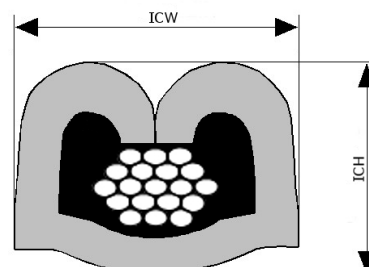

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1005 + 1021
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1005 0,35 + 1021 0,50 | | 1,60 + 0,96 | 55 | 1,10 | 0,05 | 2,25 | 0,10 | 2,00 | 0,10 | 2,60 | 0,10 |



Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN

1021:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

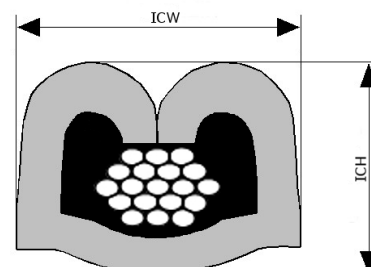

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50 | 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1007
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,70
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1007 0,50 | | 2,15 | 80 | 1,10 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,50 | 0,10 |
| 1007 0,80 | | 2,33 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |
| 1007 1,00 | | 2,58 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1007
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
 Insulation Range Φ [mm]: 2,20 - 2,45
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1007 0,80 | | 2,33 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR

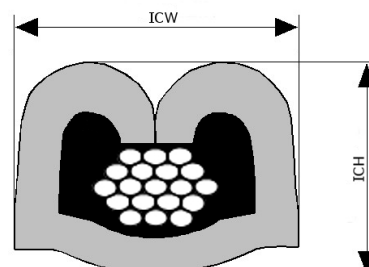

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50 | 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1007
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,00 - 2,70
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1007 0,50 | | 2,15 | 80 | 1,10 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,50 | 0,10 |
| 1007 0,80 | | 2,33 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |
| 1007 1,00 | | 2,58 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR

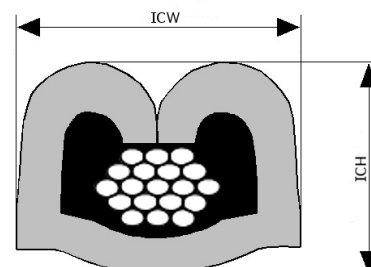

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50 | 0,51 | 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1009
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,30 - 3,05
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1009 0,50 | | 2,45 | 80 | 1,10 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |
| 1009 0,51 | | 2,45 | 80 | 1,10 | 0,05 | 2,02 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |
| 1009 0,80 | | 2,78 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL



Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50 | 0,51 | 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1009
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,30 - 3,05
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1009 0,50 | | 2,45 | 80 | 1,10 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |
| 1009 0,51 | | 2,45 | 80 | 1,10 | 0,05 | 2,02 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |
| 1009 0,80 | | 2,78 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL

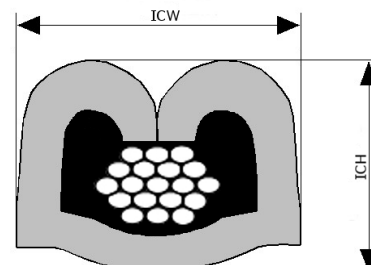

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1019
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,70 - 1,90
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1019 0,80 | | 1,80 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,70 | 0,10 |

Cable type code legend:

1019:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: THIN SPECIAL

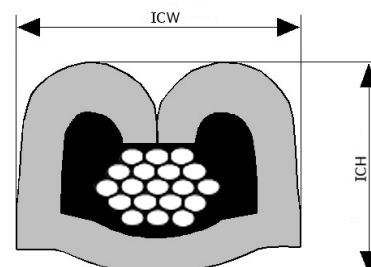

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50 | 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1021
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 0,90 - 1,57
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1021 0,50 | | 0,96 | 80 | 1,10 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,50 | 0,10 |
| 1021 0,80 | | 1,16 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,50 | 0,10 |
| 1021 1,00 | | 1,46 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1021:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

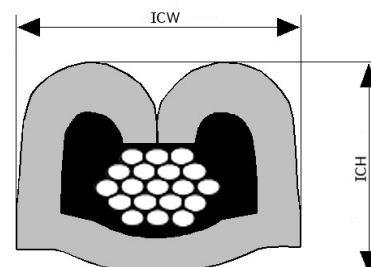

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1021
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 0,90 - 1,57
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1021 0,50 | | 0,96 | 80 | 1,10 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,50 | 0,10 |
| 1021 1,00 | | 1,46 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1021:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE



Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1021 + 1021
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1021 0,50 + 1021 0,50 | | 0,96 + 0,96 | 80 | 1,35 | 0,05 | 2,35 | 0,10 | 2,20 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1021:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE



Crimp Information Sheet

Terminal Part Number: 12047767

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1021 + 1021

Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD

Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1021 0,50 + 1021 0,50 | | 0,96 + 0,96 | 80 | 1,35 | 0,05 | 2,35 | 0,10 | 2,20 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1021:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: NONE

Insul. Wall Designator: NONE

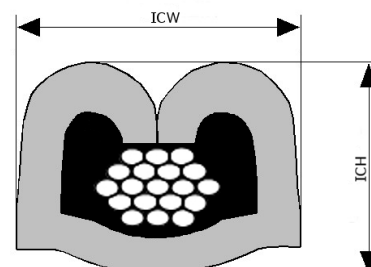

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1025
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,85 - 2,40
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1025 0,80 | | 2,02 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,50 | 0,10 |
| 1025 1,00 | | 2,23 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1025:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
 Insul. Wall Designator: THIN

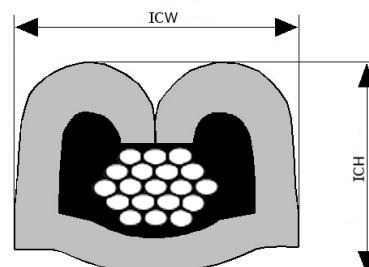

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1025
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 1,85 - 2,40
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1025 0,80 | | 2,02 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,60 | 0,10 |
| 1025 1,00 | | 2,23 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1025:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1026
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,20 - 2,65
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1026 0,80 | | 2,33 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,70 | 0,10 |
| 1026 1,00 | | 2,55 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1026:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: HDPE, PVC, XLPE
 Insul. Wall Designator: REGULAR

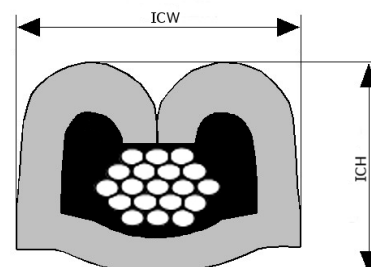

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1026
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,20 - 2,65
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1026 0,80 | | 2,33 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,70 | 0,10 |
| 1026 1,00 | | 2,55 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1026:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: HDPE, PVC, XLPE
 Insul. Wall Designator: REGULAR

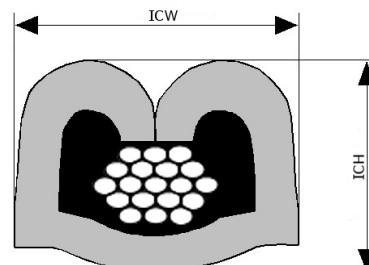

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50 | 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1035
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,45
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1035 0,50 | | 2,15 | 80 | 1,10 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |
| 1035 0,80 | | 2,33 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |

Cable type code legend:

1035:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: XLPE
 Insul. Wall Designator: REGULAR

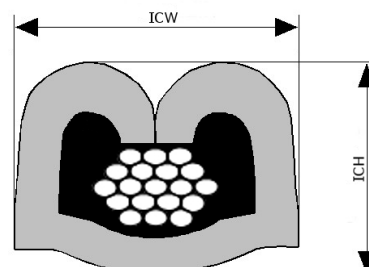

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50 | 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1044
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,30 - 2,80
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1044 0,50 | | 2,45 | 120 | 1,10 | 0,05 | 2,05 | 0,10 | 2,50 | 0,10 | 2,70 | 0,10 |
| 1044 0,80 | | 2,65 | 200 | 1,15 | 0,05 | 2,05 | 0,10 | 2,50 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1044:

Industry Designator: SAE
 Conductor Material: STEEL
 Conductor Plating: NONE
 Insul. Material: XLPE
 Insul. Wall Designator: SPECIAL



Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1047 + 1021
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1047 0,35 + 1021 0,50 | | 1,58 + 0,96 | 70 | 1,10 | 0,05 | 2,25 | 0,10 | 2,00 | 0,10 | 2,60 | 0,10 |



Cable type code legend:

1047:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: THIN

1021:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

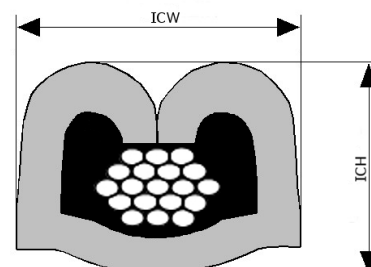

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1051
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,85 - 2,18
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1051 0,80 | | 2,02 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,50 | 0,10 |

Cable type code legend:

1051:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1051
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 1,85 - 2,18
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1051 0,80 | | 2,02 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,50 | 0,10 |

Cable type code legend:

1051:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: XLPE
 Insul. Wall Designator: THIN

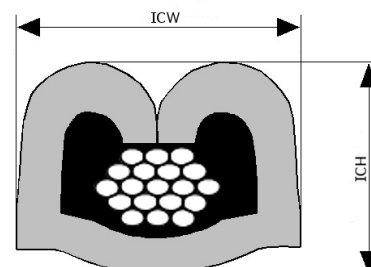

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1056
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,05 - 2,40
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1056 1,00 | | 2,23 | 120 | 1,25 | 0,05 | 2,10 | 0,10 | 2,30 | 0,10 | 2,70 | 0,10 |

Cable type code legend:

1056:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NI
 Insul. Material: FLUORPOLYM, PTFE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1090
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,38 - 1,47
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1090 1,00 | | 1,43 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1090:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

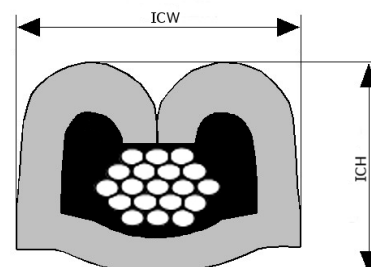

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1090
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 1,38 - 1,47
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1090 1,00 | | 1,43 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

1090:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

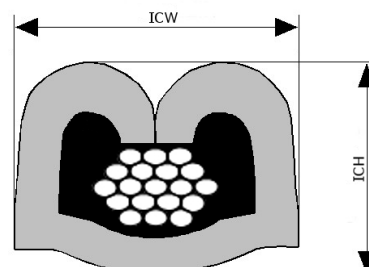

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1092
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,30
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1092 0,50 | | 2,15 | 80 | 1,10 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |

Cable type code legend:

1092:

Industry Designator: SAE
 Conductor Material: ALLOY
 Conductor Plating: NONE
 Insul. Material: XLPE
 Insul. Wall Designator: REGULAR

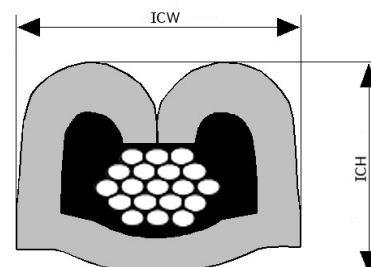

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1094
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,35 - 2,50
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1094 0,50 | | 2,43 | 80 | 1,10 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |

Cable type code legend:

1094:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: HEAVY DUTY

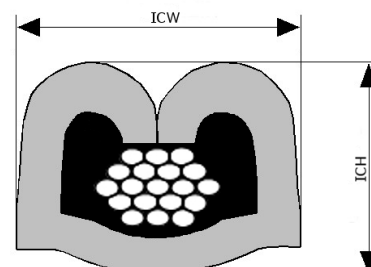

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1094
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,35 - 2,50
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1094 0,50 | | 2,43 | 80 | 1,10 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,50 | 0,10 |

Cable type code legend:

1094:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: HEAVY DUTY



Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,75 | 1,00 | 1,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,70 - 2,60
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2005 0,75 | | 1,93 | 85 | 1,15 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,40 | 0,10 |
| 2005 1,00 | | 2,18 | 120 | 1,20 | 0,05 | 2,05 | 0,10 | 2,60 | 0,10 | 2,60 | 0,10 |
| 2005 1,50 | | 2,40 | 160 | 1,40 | 0,05 | 2,05 | 0,10 | 2,80 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

2005: FLR2X (SAAB C)
 Industry Designator: ISO
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, TPE, XLPE
 Insul. Wall Designator: THIN

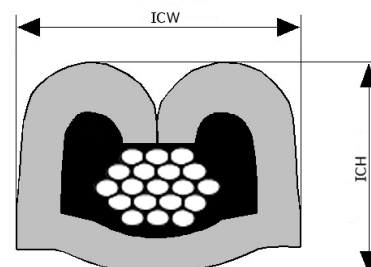

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,75

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 2006
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,20 - 2,80
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2006 0,75 | | 2,50 | 85 | 1,15 | 0,05 | 2,05 | 0,10 | 2,40 | 0,10 | 2,40 | 0,10 |

Cable type code legend:

2006:

Industry Designator: ISO
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: EPR, PVC, XLPE
 Insul. Wall Designator: REGULAR

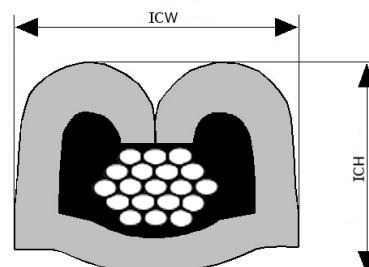

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50 | 0,75 | 1,00 | 1,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,30 - 2,40
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2010 0,50 | | 1,50 | 80 | 1,00 | 0,05 | 2,25 | 0,10 | 2,00 | 0,10 | 2,60 | 0,10 |
| 2010 0,75 | | 1,75 | 120 | 1,20 | 0,05 | 1,95 | 0,10 | 2,20 | 0,10 | 2,60 | 0,10 |
| 2010 1,00 | | 1,95 | 160 | 1,30 | 0,05 | 1,95 | 0,10 | 2,35 | 0,10 | 2,60 | 0,10 |
| 2010 1,50 | | 2,20 | 160 | 1,35 | 0,05 | 2,05 | 0,10 | 2,40 | 0,10 | 2,70 | 0,10 |

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

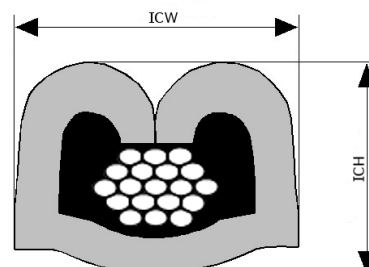

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,35 | 0,50 | 0,75

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 2010 + 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2010 0,35 + 2010 0,35 | | 1,34 + 1,34 | 50 | 1,05 | 0,05 | 2,20 | 0,10 | 2,50 | 0,10 | 2,70 | 0,10 |
| 2010 0,35 + 2010 0,50 | | 1,34 + 1,50 | 50 | 1,10 | 0,05 | 2,20 | 0,10 | 2,60 | 0,10 | 2,70 | 0,10 |
| 2010 0,50 + 2010 0,50 | | 1,50 + 1,50 | 75 | 1,25 | 0,05 | 2,05 | 0,10 | 2,50 | 0,10 | 2,70 | 0,10 |
| 2010 0,50 + 2010 0,75 | | 1,50 + 1,75 | 93 | 1,30 | 0,05 | 2,05 | 0,10 | 2,35 | 0,10 | 2,70 | 0,10 |

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B

Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC
 Insul. Wall Designator: THIN

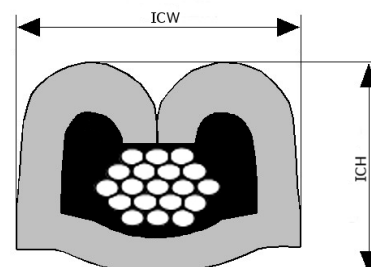

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,35

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 2010 + 2010
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2010 0,35 + 2010 0,35 | | 1,34 + 1,34 | 50 | 1,05 | 0,05 | 2,20 | 0,10 | 2,50 | 0,10 | 2,70 | 0,10 |

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B

Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC
 Insul. Wall Designator: THIN

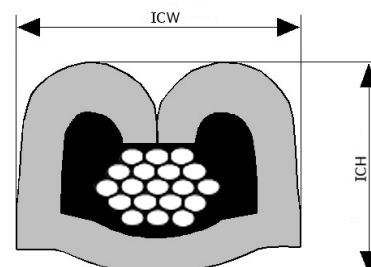

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,75 | 1,00



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2011
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,05 - 2,70
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2011 0,75 | | 2,28 | 85 | 1,15 | 0,05 | 2,00 | 0,10 | 2,10 | 0,10 | 2,60 | 0,10 |
| 2011 1,00 | | 2,54 | 184 | 1,25 | 0,05 | 2,05 | 0,10 | 2,50 | 0,10 | 2,70 | 0,10 |

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: P/EST, PE, PVC, XLPE
 Insul. Wall Designator: REGULAR

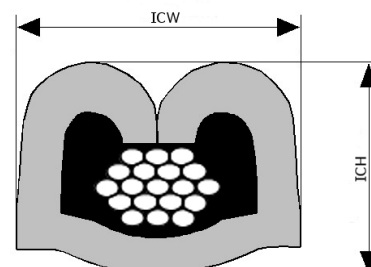

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,75 | 1,00



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2017
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,60 - 2,10
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2017 0,75 | | 1,75 | 165 | 1,15 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,65 | 0,10 |
| 2017 1,00 | | 1,95 | 160 | 1,30 | 0,05 | 1,95 | 0,10 | 2,35 | 0,10 | 2,70 | 0,10 |

Cable type code legend:

2017: FLR41X-B, FLRY-A
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PA, PP, PVC, XLPE
 Insul. Wall Designator: THIN

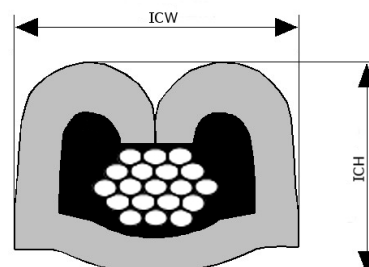

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50 | 0,75

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 2039
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,18 - 1,52
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2039 0,50 | | 1,28 | 75 | 1,10 | 0,05 | 2,05 | 0,10 | 2,00 | 0,10 | 2,60 | 0,10 |
| 2039 0,75 | | 1,43 | 85 | 1,15 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

2039:

Industry Designator: ISO
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PPE, PVC
 Insul. Wall Designator: ULTRA THIN

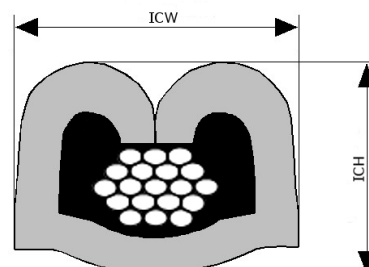

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 2041
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,43 - 1,61
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2041 0,50 | | 1,52 | 75 | 1,05 | 0,05 | 2,00 | 0,10 | 2,00 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

2041:

Industry Designator: ISO
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,30



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 3004 + 3004
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 3004 0,30 + 3004 0,30 | | 1,40 + 1,40 | 50 | 1,05 | 0,05 | 2,00 | 0,10 | 2,60 | 0,10 | 2,40 | 0,10 |

Cable type code legend:

3004: AVSS
 Industry Designator: JIS/JA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE, X-PVC
 Insul. Wall Designator: THIN

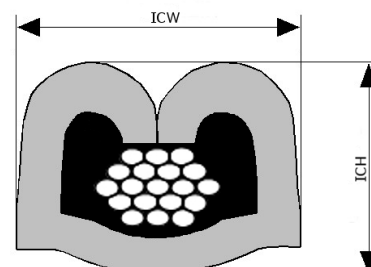

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,50 | 0,75 | 1,00 | 1,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 8000
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,40 - 2,40
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 8000 0,50 | | 1,50 | 80 | 1,00 | 0,05 | 2,25 | 0,10 | 2,00 | 0,10 | 2,60 | 0,10 |
| 8000 0,75 | | 1,80 | 85 | 1,15 | 0,05 | 2,05 | 0,10 | 2,10 | 0,10 | 2,60 | 0,10 |
| 8000 1,00 | | 2,00 | 120 | 1,25 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,60 | 0,10 |
| 8000 1,50 | | 2,30 | 160 | 1,35 | 0,05 | 2,05 | 0,10 | 2,40 | 0,10 | 2,70 | 0,10 |

Cable type code legend:

8000:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: SYNTHRESIN
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 9003
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,15 - 2,54
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 9003 0,80 | | 2,25 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,70 | 0,10 |
| 9003 1,00 | | 2,46 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

9003:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PVDF
 Insul. Wall Designator: MIX

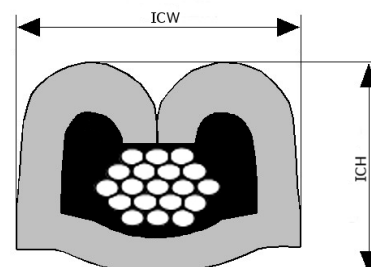

Crimp Information Sheet

Terminal Part Number: 12047767
 Surface Plating: SN
 Material Thickness [mm]: 0,25
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 9003
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,15 - 2,54
 Seal(s): NONE

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|-------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 9003 0,80 | | 2,25 | 90 | 1,20 | 0,05 | 2,05 | 0,10 | 2,20 | 0,10 | 2,70 | 0,10 |
| 9003 1,00 | | 2,46 | 120 | 1,35 | 0,05 | 2,05 | 0,10 | 2,30 | 0,10 | 2,60 | 0,10 |

Cable type code legend:

9003:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PVDF
 Insul. Wall Designator: MIX

