

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1002  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,40  
 Seal(s): 15324976 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1002 0,80 / 15324976		2,02	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10
1002 1,00 / 15324973		2,23	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

Cable type code legend:

1002:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1002  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 2,05 - 2,40  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1002 1,00 / 15324973		2,23	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

## Cable type code legend:

1002:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1002  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,40  
 Seal(s): 15324976 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1002 0,80 / 15324976		2,02	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10
1002 1,00 / 15324973		2,23	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

Cable type code legend:

1002:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1003  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1003 0,80 / 15324973		2,33	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10

## Cable type code legend:

1003:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ECTFE, ETFE, PTFE, PUR, TFE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1005  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,60 - 2,40  
 Seal(s): 15324976 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50 / 15324976		1,74	80	1,10	0,05	2,05	0,10	3,70	0,10	4,00	0,10
1005 0,80 / 15324976		2,03	90	1,20	0,05	2,05	0,10	3,90	0,10	4,10	0,10
1005 1,00 / 15324973		2,23	120	1,35	0,05	2,05	0,10	3,70	0,10	4,00	0,10

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.*

*For more information, please  
 consult your local sales office*



Cable Type codes: 1005  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 2,05 - 2,40  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 1,00 / 15324973		2,23	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN

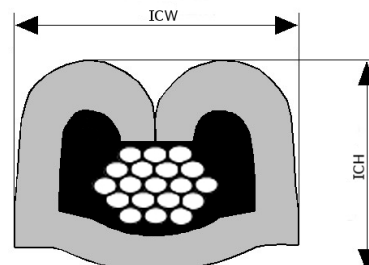

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1005  
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,20  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80 / 15324976		2,03	90	1,20	0,05	2,05	0,10	3,90	0,10	4,10	0,10

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,80 | 1,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*



Cable Type codes: 1005  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 1,60 - 2,40  
 Seal(s): 15324976 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50 / 15324976		1,74	80	1,10	0,05	2,05	0,10	3,70	0,10	4,00	0,10
1005 0,80 / 15324976		2,03	90	1,20	0,05	2,05	0,10	3,90	0,10	4,10	0,10
1005 1,00 / 15324973		2,23	120	1,35	0,05	2,05	0,10	3,70	0,10	4,00	0,10

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN

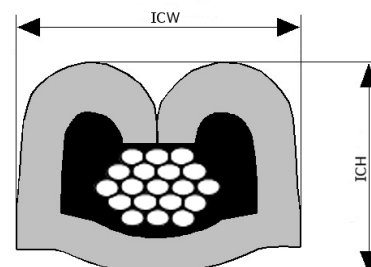



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1007  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,70  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50 / 15324973		2,15	80	1,10	0,05	2,05	0,10	3,70	0,10	4,00	0,10
1007 0,80 / 15324973		2,33	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10
1007 1,00 / 15324973		2,58	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

## Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1007  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,70  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80 / 15324973		2,33	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10
1007 1,00 / 15324973		2,58	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1007  
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80 / 15324973		2,33	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10

## Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*


Cable Type codes: 1007  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,70  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50 / 15324973		2,15	80	1,10	0,05	2,05	0,10	3,70	0,10	4,00	0,10
1007 0,80 / 15324973		2,33	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10
1007 1,00 / 15324973		2,58	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

## Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,51 | 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1009  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,30 - 3,43  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50 / 15324973		2,45	80	1,10	0,05	2,05	0,10	3,70	0,10	4,00	0,10
1009 0,51 / 15324973		2,45	80	1,10	0,05	2,05	0,10	3,70	0,10	4,00	0,10
1009 0,80 / 15324973		2,78	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10
1009 1,00 / 15324973		3,17	120	1,35	0,05	2,05	0,10	4,10	0,10	4,20	0,10

## Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,51 | 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1009  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,30 - 3,05  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50 / 15324973		2,45	80	1,10	0,05	2,05	0,10	3,70	0,10	4,00	0,10
1009 0,51 / 15324973		2,45	80	1,10	0,05	2,05	0,10	3,70	0,10	4,00	0,10
1009 0,80 / 15324973		2,78	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10

## Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1011  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,95 - 3,30  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1011 0,80 / 15324973		3,13	90	1,20	0,05	2,05	0,10	4,40	0,10	4,20	0,10

## Cable type code legend:

1011:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE  
 Insul. Wall Designator: HEAVY DUTY



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1019  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,70 - 1,90  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1019 0,80 / 15324976		1,80	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10

## Cable type code legend:

1019:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: THIN SPECIAL





# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*


Cable Type codes: 1025  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,40  
 Seal(s): 15324973 | 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,80 / 15324976		2,02	90	1,20	0,05	2,00	0,10	3,70	0,10	3,90	0,10
1025 1,00 / 15324973		2,23	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

Cable type code legend:

1025:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80 | 1,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*



Cable Type codes: 1025  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,40  
 Seal(s): 15324976 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,80 / 15324976		2,02	90	1,20	0,05	2,00	0,10	3,70	0,10	3,90	0,10
1025 1,00 / 15324973		2,23	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

Cable type code legend:

1025:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE  
 Insul. Wall Designator: THIN

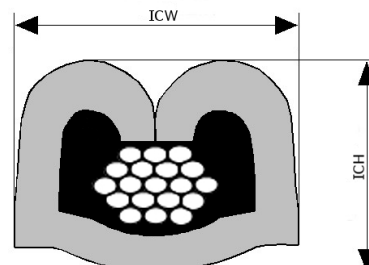

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1026  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,65  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,80 / 15324973		2,33	90	1,20	0,05	2,00	0,10	3,70	0,10	3,90	0,10
1026 1,00 / 15324973		2,55	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

Cable type code legend:

1026:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: HDPE, PVC, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1026  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 2,45 - 2,65  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 1,00 / 15324973		2,55	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

## Cable type code legend:

1026:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: HDPE, PVC, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1026  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,45 - 2,65  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 1,00 / 15324973		2,55	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

## Cable type code legend:

1026:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: HDPE, PVC, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1028  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,95 - 3,15  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1028 0,80 / 15324973		3,05	90	1,20	0,05	2,00	0,10	4,20	0,10	4,20	0,10

## Cable type code legend:

1028:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: HEAVY DUTY



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1035  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1035 0,80 / 15324973		2,33	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10

## Cable type code legend:

1035:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1040  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,18  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1040 0,80 / 15324976		2,02	200	1,15	0,05	2,05	0,10	3,70	0,10	4,00	0,10

## Cable type code legend:

1040:

Industry Designator: SAE  
 Conductor Material: STAINLESS STEEL  
 Conductor Plating: NONE  
 Insul. Material: ECTFE, ETFE, PTFE, PUR, TFE  
 Insul. Wall Designator: THIN





# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1041  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,45  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1041 0,80 / 15324973		2,33	200	1,15	0,05	2,05	0,10	3,70	0,10	4,00	0,10

## Cable type code legend:

1041:

Industry Designator: SAE  
 Conductor Material: STAINLESS STEEL  
 Conductor Plating: NONE  
 Insul. Material: PTFE, TFE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1044  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,30 - 2,80  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1044 0,50 / 15324973		2,45	120	1,10	0,05	2,05	0,10	3,70	0,10	4,00	0,10
1044 0,80 / 15324973		2,65	200	1,15	0,05	2,05	0,10	3,70	0,10	4,00	0,10

Cable type code legend:

1044:

Industry Designator: SAE  
 Conductor Material: STEEL  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: SPECIAL



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1056  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,18  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1056 0,80 / 15324976		2,02	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10

## Cable type code legend:

1056:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NI  
 Insul. Material: FLUORPOLYM, PTFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1058  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,18  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1058 0,80 / 15324976		2,02	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10

## Cable type code legend:

1058:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NI  
 Insul. Material: XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1061  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,85 - 2,18  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1061 0,80 / 15324976		2,02	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10

## Cable type code legend:

1061:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: AG  
 Insul. Material: PTFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1066  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 0,00 - 0,00  
 Seal(s): 12084193

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1066 0,80 / 12084193		0,00	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10

## Cable type code legend:

1066:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: NONE  
 Insul. Wall Designator: NONE



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1066  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 0,00 - 0,00  
 Seal(s): 12084193

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1066 0,80 / 12084193		0,00	90	1,20	0,05	2,05	0,10	3,90	0,10	4,00	0,10

## Cable type code legend:

1066:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: NONE  
 Insul. Wall Designator: NONE



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1069  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,09 - 2,25  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1069 1,00 / 15324973		2,17	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

## Cable type code legend:

1069:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: ETFE  
 Insul. Wall Designator: THIN





# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1085  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,90 - 3,10  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1085 1,00 / 15324973		3,00	126	1,30	0,05	2,05	0,10	4,00	0,10	4,20	0,10

## Cable type code legend:

1085:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: TPE  
 Insul. Wall Designator: HEAVY



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1094  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,35 - 3,15  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50 / 15324973		2,43	80	1,10	0,05	2,05	0,10	3,70	0,10	4,00	0,10
1094 1,00 / 15324973		3,03	120	1,35	0,05	2,05	0,10	4,10	0,10	4,20	0,10

Cable type code legend:

1094:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: HEAVY DUTY



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1094  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,35 - 2,50  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50 / 15324973		2,43	80	1,10	0,05	2,05	0,10	3,70	0,10	4,00	0,10

## Cable type code legend:

1094:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: HEAVY DUTY



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1098  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,09 - 2,25  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1098 1,00 / 15324973		2,17	120	1,35	0,05	2,00	0,10	3,80	0,10	4,10	0,10

## Cable type code legend:

1098:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ETFE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,75



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2003  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,10 - 2,50  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2003 0,75 / 15324973		2,30	90	1,15	0,05	2,00	0,10	3,80	0,10	4,10	0,10

## Cable type code legend:

2003: FL4G  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: EVA, PVC  
 Insul. Wall Designator: REGULAR

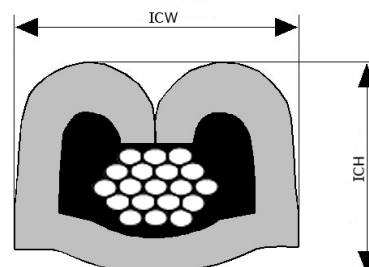

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,75



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2003  
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED  
 Insulation Range  $\Phi$ [mm]: 2,10 - 2,50  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2003 0,75 / 15324973		2,30	90	1,15	0,05	2,00	0,10	3,80	0,10	4,10	0,10

## Cable type code legend:

2003: FL4G  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: EVA, PVC  
 Insul. Wall Designator: REGULAR

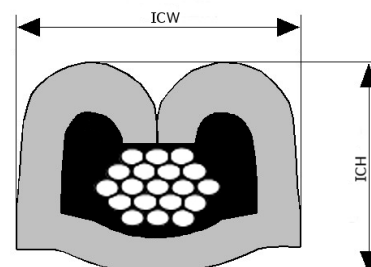

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2004  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,41 - 2,60  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2004 1,50 / 15324973		2,51	160	1,35	0,05	2,05	0,10	3,90	0,10	4,10	0,10

## Cable type code legend:

2004: FLR41X-B  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: THIN

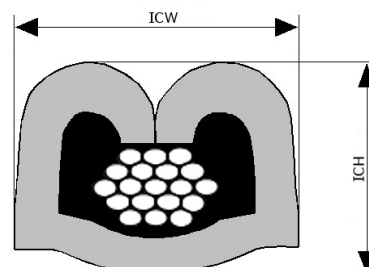

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,75 | 1,00 | 1,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2005  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,70 - 2,60  
 Seal(s): 15324976 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2005 0,75 / 15324976		1,93	85	1,15	0,05	2,00	0,10	3,60	0,10	3,90	0,10
2005 1,00 / 15324973		2,18	120	1,25	0,05	2,05	0,10	3,70	0,10	4,00	0,10
2005 1,50 / 15324973		2,40	160	1,35	0,05	2,05	0,10	3,90	0,10	4,00	0,10

## Cable type code legend:

2005: FLR2X (SAAB C)  
 Industry Designator: ISO  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, TPE, XLPE  
 Insul. Wall Designator: THIN

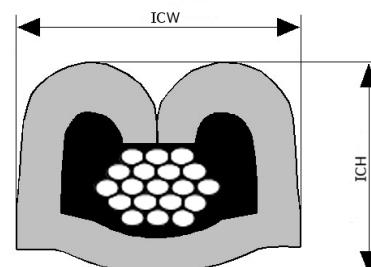



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,75 | 1,00 | 1,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2010  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,30 - 2,40  
 Seal(s): 15324976 | 15324974 | 10720769 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,50 / 15324976		1,50	75	1,10	0,05	1,90	0,10	3,70	0,10	4,10	0,10
2010 0,75 / 10720769		1,75	120	1,35	0,05	1,90	0,10	3,90	0,10	4,10	0,10
2010 1,00 / 15324974		1,95	160	1,45	0,05	1,90	0,10	4,00	0,10	4,10	0,10
2010 1,00 / 10720769		1,95	160	1,45	0,05	1,90	0,10	4,00	0,10	4,10	0,10
2010 1,50 / 15324973		2,20	160	1,35	0,05	2,05	0,10	3,90	0,10	4,10	0,10

## Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

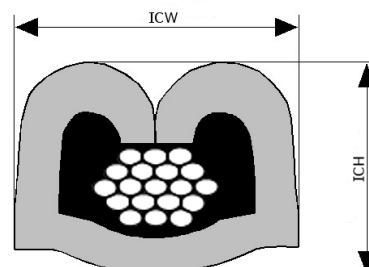

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,75



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2011  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,05 - 2,50  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 0,75 / 15324973		2,28	85	1,15	0,05	2,00	0,10	3,80	0,10	4,10	0,10

## Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: P/EST, PE, PVC, XLPE  
 Insul. Wall Designator: REGULAR

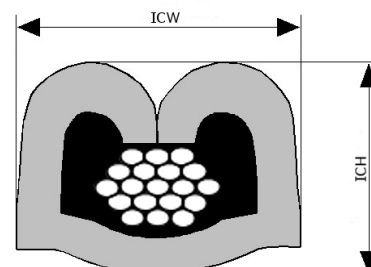

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2013  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,80 - 1,90  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2013 0,50 / 15324976		1,85	80	1,10	0,05	2,00	0,10	3,70	0,10	4,00	0,10

## Cable type code legend:

2013:

Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PUR, PVC, SYNTHRESIN, XLPE, XLPE/PVDF  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2013  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 1,80 - 1,90  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2013 0,50 / 15324976		1,85	80	1,10	0,05	2,00	0,10	3,70	0,10	4,00	0,10

## Cable type code legend:

2013:

Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PUR, PVC, SYNTHRESIN, XLPE, XLPE/PVDF  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2016  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 0,75 - 1,00  
 Seal(s): 15324818

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2016 0,50 / 15324818		0,88	75	1,05	0,05	2,00	0,10	3,40	0,10	4,00	0,10

## Cable type code legend:

2016: DIN-CORE  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: NONE  
 Insul. Wall Designator: NONE

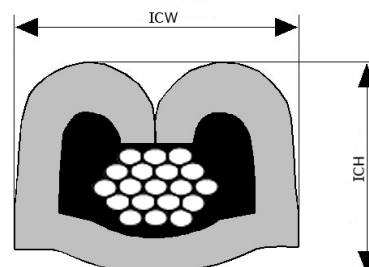

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,75 | 1,00 | 1,50

*This document is non-contractual  
and for information only.*


*For more information, please  
consult your local sales office*

Cable Type codes: 2017  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,60 - 2,40  
 Seal(s): 12089442 | 12052924

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,75 / 12089442		1,75	170	1,20	0,05	2,05	0,10	3,80	0,10	4,15	0,10
2017 1,00 / 12089442		1,95	219	1,25	0,05	2,05	0,10	3,85	0,10	4,10	0,10
2017 1,50 / 12052924		2,20	287	1,35	0,05	2,10	0,10	3,95	0,10	4,15	0,10

## Cable type code legend:

2017: FLR41X-B, FLRY-A  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PA, PP, PVC, XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,75 | 1,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2019  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,50 - 2,40  
 Seal(s): 15324976 | 12110213

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2019 0,75 / 15324976		1,70	85	1,10	0,05	2,00	0,10	3,70	0,10	4,10	0,10
2019 1,50 / 12110213		2,20	262	1,35	0,05	2,05	0,10	3,85	0,10	4,20	0,10

## Cable type code legend:

2019: FL7Y 179, FLR7Y, FLR7Y-A, FLR7Y-B, FLU7Y  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: ETFE  
 Insul. Wall Designator: THIN

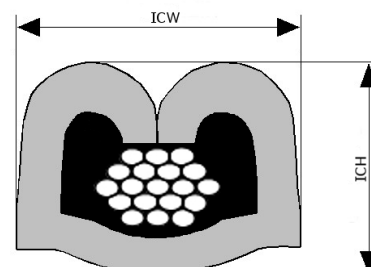

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,00



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2021  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,70 - 2,10  
 Seal(s): 15327860

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2021 1,00 / 15327860		1,90	108	1,25	0,05	2,05	0,10	3,80	0,10	4,15	0,10

## Cable type code legend:

2021: FLR6Y-A, FLR6Y-B  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ETFE, FEP, XLETFE  
 Insul. Wall Designator: THIN

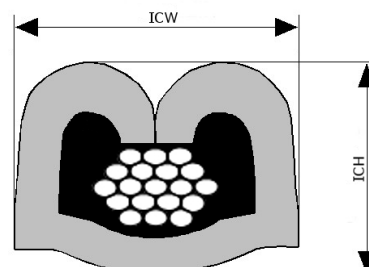



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,75



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2023  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,50  
 Seal(s): 12052924

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2023 0,75 / 12052924		2,35	169	1,20	0,05	2,05	0,10	3,85	0,10	4,15	0,10

## Cable type code legend:

2023: FL2G  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: SIL, SIR  
 Insul. Wall Designator: REGULAR

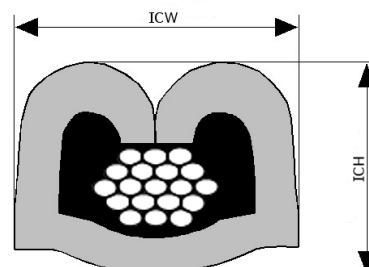

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,00



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2034  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,40 - 2,70  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2034 1,00 / 15324973		2,55	160	1,45	0,05	1,90	0,10	4,00	0,10	4,10	0,10

## Cable type code legend:

2034: FL2G  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: SIL  
 Insul. Wall Designator: REGULAR

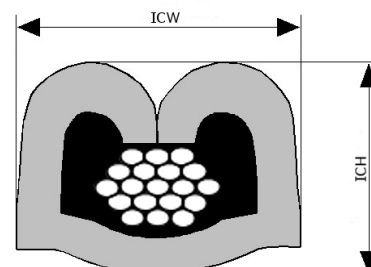

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,40



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2044  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,40  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2044 1,40 / 15324973		2,30	120	1,35	0,05	2,10	0,10	3,75	0,10	4,15	0,10

## Cable type code legend:

2044: A3Z, F3Z, FL RENAULT A3Z  
 Industry Designator: NRA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: XLPA/PVDF, XLPE, X-POLY ZH  
 Insul. Wall Designator: THIN

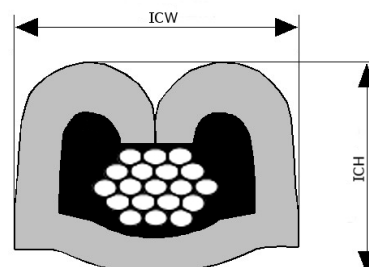

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,75

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2050  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,50  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2050 0,75 / 15324973		2,35	85	1,15	0,05	2,00	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

2050:

Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: EVA  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,75 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2083  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,40 - 2,10  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2083 0,50 / 15324976		1,55	75	1,10	0,05	1,90	0,10	3,70	0,10	4,10	0,10
2083 0,75 / 15324976		1,80	85	1,15	0,05	2,00	0,10	3,70	0,10	4,00	0,10
2083 1,00 / 15324976		2,00	120	1,25	0,05	2,05	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

2083:

Industry Designator: ISO  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC (YW)  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,85



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 3003  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,70 - 1,90  
 Seal(s): 12089442 | 15458380 | 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3003 0,85 / 12089442		1,80	95	1,20	0,05	2,05	0,10	3,70	0,10	4,10	0,10
3003 0,85 / 15458380		1,80	95	1,20	0,05	2,05	0,10	3,60	0,10	4,10	0,10
3003 0,85 / 15324976		1,80	127	1,20	0,05	2,05	0,10	3,60	0,10	4,10	0,10

## Cable type code legend:

3003: AVSS  
 Industry Designator: JIS/JA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, X-PVC  
 Insul. Wall Designator: THIN

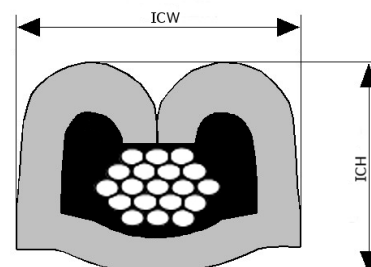

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,85 | 1,25



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 3004  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,50 - 2,20  
 Seal(s): 15324974 | 12089442 | 15458380 | 13749992 | 15393249 | 15324973 | 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,50 / 15324974		1,60	75	1,05	0,05	2,00	0,10	3,60	0,10	4,10	0,10
3004 0,50 / 12089442		1,60	70	1,05	0,05	2,00	0,10	3,50	0,10	4,10	0,10
3004 0,50 / 15458380		1,60	75	1,05	0,05	2,00	0,10	3,50	0,10	4,10	0,10
3004 0,50 / 13749992		1,60	75	1,05	0,05	2,00	0,10	3,70	0,10	4,10	0,10
3004 0,50 / 15393249		1,60	75	1,05	0,05	2,00	0,10	3,70	0,10	4,10	0,10
3004 0,85 / 15458380		1,80	95	1,20	0,05	2,05	0,10	3,80	0,10	4,10	0,10
3004 0,85 / 15324973		1,80	95	1,20	0,05	2,05	0,10	3,50	0,10	4,00	0,10
3004 0,85 / 15324976		1,80	95	1,20	0,05	2,05	0,10	3,60	0,10	4,10	0,10
3004 1,25 / 15324973		2,10	135	1,35	0,05	2,05	0,10	3,60	0,10	4,10	0,10
3004 1,25 / 15324976		2,10	135	1,35	0,05	2,05	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

3004: AVSS  
 Industry Designator: JIS/JA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE, X-PVC  
 Insul. Wall Designator: THIN

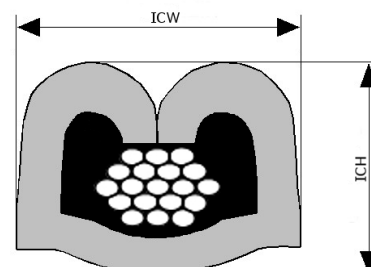

# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 3006  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 0,90 - 1,00  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3006 0,50 / 15324974		0,95	75	1,05	0,05	2,00	0,10	3,60	0,10	4,10	0,10

## Cable type code legend:

3006:

Industry Designator: JIS/JA  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: NONE  
 Insul. Wall Designator: NONE





# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 5002  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,10 - 2,18  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
5002 1,00 / 15324973		2,14	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

## Cable type code legend:

5002:

Industry Designator: UL  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: ETFE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,75 | 1,00 | 1,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 8000  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,70 - 2,40  
 Seal(s): 15324976 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 0,75 / 15324976		1,80	85	1,15	0,05	2,00	0,10	3,70	0,10	4,00	0,10
8000 1,00 / 15324973		2,00	120	1,25	0,05	2,05	0,10	3,70	0,10	4,10	0,10
8000 1,50 / 15324973		2,30	160	1,35	0,05	2,05	0,10	3,90	0,10	4,10	0,10

## Cable type code legend:

8000:

Industry Designator: N/G  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: SYNTHRESIN  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 9002  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,51 - 2,72  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9002 1,00 / 15324973		2,62	120	1,35	0,05	2,05	0,10	4,10	0,10	4,20	0,10

## Cable type code legend:

9002:

Industry Designator: MISC  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVDF  
 Insul. Wall Designator: MIX



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 9003  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,15 - 2,54  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,80 / 15324973		2,25	90	1,20	0,05	2,00	0,10	3,70	0,10	3,90	0,10
9003 1,00 / 15324973		2,46	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

Cable type code legend:

9003:

Industry Designator: N/G  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PVDF  
 Insul. Wall Designator: MIX



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 9003  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 2,38 - 2,54  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 1,00 / 15324973		2,46	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

## Cable type code legend:

9003:

Industry Designator: N/G  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PVDF  
 Insul. Wall Designator: MIX



# Crimp Information Sheet

Terminal Part Number: 12048074  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 9003  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,38 - 2,54  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 1,00 / 15324973		2,46	120	1,35	0,05	2,05	0,10	4,00	0,10	4,00	0,10

## Cable type code legend:

9003:

Industry Designator: N/G  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PVDF  
 Insul. Wall Designator: MIX

