

# Crimp Information Sheet

Terminal Part Number: 12124581  
 Surface Plating: SN  
 Material Thickness [mm]: 0,32  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1005  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 3,00 - 3,25  
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 3,00 / 15324980		3,13	250	1,95	0,05	3,65	0,10	4,80	0,10	5,00	0,10

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12124581  
 Surface Plating: SN  
 Material Thickness [mm]: 0,32  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1005  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 3,00 - 3,25  
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 3,00 / 15324980		3,13	250	1,95	0,05	3,65	0,10	4,80	0,10	5,00	0,10

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12124581  
 Surface Plating: SN  
 Material Thickness [mm]: 0,32  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1005  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 3,00 - 3,25  
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 3,00 / 15324980		3,13	250	2,00	0,05	3,00	0,10	4,70	0,10	5,00	0,10

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12124581  
 Surface Plating: SN  
 Material Thickness [mm]: 0,32  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1007  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 3,45 - 3,81  
 Seal(s): 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 3,00 / 15324981		3,63	250	1,95	0,05	3,65	0,10	4,90	0,10	5,00	0,10

## Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12124581  
 Surface Plating: SN  
 Material Thickness [mm]: 0,32  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1007  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 3,45 - 3,81  
 Seal(s): 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 3,00 / 15324981		3,63	250	1,95	0,05	3,65	0,10	4,90	0,10	5,00	0,10

## Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12124581  
 Surface Plating: SN  
 Material Thickness [mm]: 0,32  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*



Cable Type codes: 1007  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 3,45 - 3,81  
 Seal(s): 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 3,00 / 15324981		3,63	250	1,95	0,05	3,65	0,10	4,90	0,10	5,00	0,10

## Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR

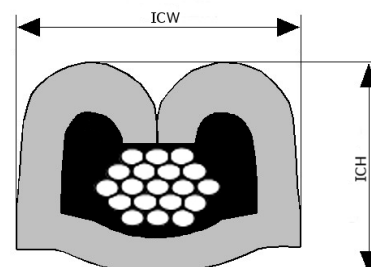

# Crimp Information Sheet

Terminal Part Number: 12124581  
 Surface Plating: SN  
 Material Thickness [mm]: 0,32  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1007  
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED  
 Insulation Range  $\Phi$ [mm]: 3,45 - 3,81  
 Seal(s): 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 3,00 / 15324981		3,63	250	1,95	0,05	3,65	0,10	4,90	0,10	5,00	0,10

## Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 12124581  
 Surface Plating: SN  
 Material Thickness [mm]: 0,32  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1009  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 4,00 - 4,25  
 Seal(s): 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 3,00 / 15324981		4,13	250	1,95	0,05	3,65	0,10	5,20	0,10	5,10	0,10

## Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL





# Crimp Information Sheet

Terminal Part Number: 12124581  
 Surface Plating: SN  
 Material Thickness [mm]: 0,32  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1009  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 4,00 - 4,25  
 Seal(s): 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 3,00 / 15324981		4,13	250	1,95	0,05	3,65	0,10	5,20	0,10	5,10	0,10

## Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL



# Crimp Information Sheet

Terminal Part Number: 12124581  
 Surface Plating: SN  
 Material Thickness [mm]: 0,32  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1009  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 4,00 - 4,25  
 Seal(s): 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 3,00 / 15324981		4,13	250	2,00	0,05	3,00	0,10	4,80	0,10	5,00	0,10

## Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL



# Crimp Information Sheet

Terminal Part Number: 12124581  
 Surface Plating: SN  
 Material Thickness [mm]: 0,32  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1009  
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED  
 Insulation Range  $\Phi$ [mm]: 4,00 - 4,25  
 Seal(s): 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 3,00 / 15324981		4,13	250	1,95	0,05	3,65	0,10	5,20	0,10	5,10	0,10

## Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL



# Crimp Information Sheet

Terminal Part Number: 12124581  
 Surface Plating: SN  
 Material Thickness [mm]: 0,32  
 Cross Section [mm<sup>2</sup>]: 2,50 | 4,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2010  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,60 - 3,70  
 Seal(s): 15324981 | 15363991

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 2,50 / 15363991		2,80	250	2,00	0,05	2,90	0,10	4,90	0,10	5,00	0,10
2010 4,00 / 15324981		3,45	265	2,05	0,05	3,60	0,10	5,10	0,10	5,10	0,10

## Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B

Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC  
 Insul. Wall Designator: THIN

