

Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,45 - 1,88
 Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35 / 15366065		1,60	55	1,05	0,05	1,80	0,10	4,40	0,10	4,80	0,10
1005 0,50 / 15366065		1,74	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1007
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,30
 Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50 / 15366066		2,15	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1009
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,30 - 2,60
 Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50 / 15366066		2,45	80	1,10	0,05	1,80	0,10	4,60	0,10	4,90	0,10

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL



Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1025
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,47 - 1,85
 Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,35 / 15366065		1,55	55	1,05	0,05	1,80	0,10	4,40	0,10	4,80	0,10
1025 0,35		1,55	55	1,05	0,05	1,80	0,10	4,60	0,10	5,00	0,10
1025 0,50 / 15366065		1,73	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

1025:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1026
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,30
 Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,50 / 15366066		2,15	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

1026:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: HDPE, PVC, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,35

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1047
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,40 - 1,75
 Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1047 0,35 / 15366065		1,58	70	1,05	0,05	1,80	0,10	4,40	0,10	4,80	0,10

Cable type code legend:

1047:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1081
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,25 - 2,40
 Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1081 0,50 / 15366066		2,33	80	1,10	0,05	1,80	0,10	4,60	0,10	4,90	0,10

Cable type code legend:

1081:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: POLYALKENE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1094
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,35 - 2,50
 Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50 / 15366066		2,43	80	1,10	0,05	1,80	0,10	4,60	0,10	4,90	0,10

Cable type code legend:

1094:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: HEAVY DUTY



Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2006
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,35
 Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2006 0,50 / 15366066		2,18	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

2006:

Industry Designator: ISO
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: EPR, PVC, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,35 | 0,50 | 0,75

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,20 - 1,90
 Seal(s): 15324983 | 12191232 | 15366065 | 12191221

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,35 / 15324983		1,34	50	1,15	0,05	1,65	0,10	3,80	0,10	4,60	0,10
2010 0,35 / 12191232		1,34	50	1,15	0,05	1,65	0,10	4,60	0,10	4,60	0,10
2010 0,35 / 15366065		1,34	50	1,15	0,05	1,65	0,10	4,05	0,10	4,60	0,10
2010 0,50 / 12191232		1,50	80	1,25	0,05	1,65	0,10	4,70	0,10	4,60	0,10
2010 0,50 / 12191221		1,50	80	1,25	0,05	1,65	0,10	4,70	0,10	4,60	0,10
2010 0,50 / 15366065		1,50	80	1,25	0,05	1,65	0,10	4,15	0,10	4,60	0,10
2010 0,75 / 15366065		1,75	90	1,20	0,05	1,80	0,10	4,50	0,10	4,90	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

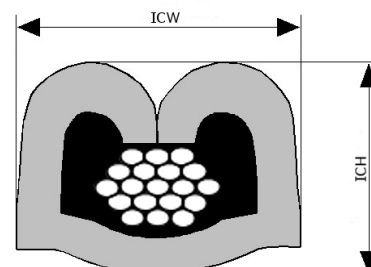

Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2011
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,30
 Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 0,50 / 15366066		2,15	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: P/EST, PE, PVC, XLPE
 Insul. Wall Designator: REGULAR

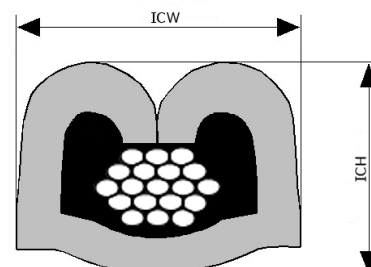

Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,35 | 0,50


*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2017
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,10 - 1,70
 Seal(s): 15366065 | 12191232

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,35 / 15366065		1,25	50	1,15	0,05	1,65	0,10	4,05	0,10	4,60	0,10
2017 0,35 / 12191232		1,25	50	1,15	0,05	1,65	0,10	4,60	0,10	4,60	0,10
2017 0,50 / 12191232		1,50	80	1,25	0,05	1,65	0,10	4,70	0,10	4,80	0,10
2017 0,50 / 15366065		1,50	80	1,25	0,05	1,65	0,10	4,15	0,10	4,60	0,10

Cable type code legend:

2017: FLR41X-B, FLRY-A
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PA, PP, PVC, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,35 | 0,50


*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2053
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,20 - 1,60
 Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2053 0,35 / 15366065		1,30	50	1,15	0,05	1,65	0,10	4,50	0,10	4,60	0,10
2053 0,50 / 15366065		1,50	80	1,25	0,05	1,65	0,10	4,60	0,10	4,60	0,10

Cable type code legend:

2053: PSA T2 ZH ID, PSA T3 ZH ID, PSA T4 ZH ID
 Industry Designator: PSA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: POLYOLEFIN, X-POLY
 Insul. Wall Designator: ID



Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,35 | 0,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2054
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,25 - 1,70
 Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2054 0,35 / 15366065		1,33	50	1,15	0,05	1,65	0,10	4,60	0,10	4,60	0,10
2054 0,50 / 15366065		1,55	80	1,25	0,05	1,65	0,10	4,70	0,10	4,65	0,10

Cable type code legend:

2054: PSA T2 IR, PSA T3 IR, PSA T3 ZH IR, PSA T4 LH IR
 Industry Designator: PSA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: POLYOLEFIN, PVC, X-POLY
 Insul. Wall Designator: IR

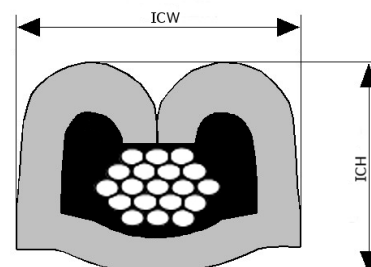

Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,30 | 0,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 3004
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,30 - 1,70
 Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,30 / 15366065		1,40	60	1,05	0,05	1,80	0,10	4,40	0,10	4,80	0,10
3004 0,50 / 15366065		1,60	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

3004: AVSS
 Industry Designator: JIS/JA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE, X-PVC
 Insul. Wall Designator: THIN

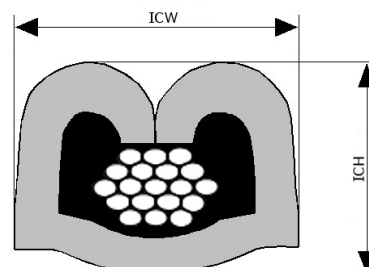

Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 8000
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,40 - 1,60
 Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 0,50 / 15366065		1,50	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

8000:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: SYNTHRESIN
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 9000
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,90 - 2,05
 Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9000 0,50 / 15366066		1,98	80	1,10	0,05	1,80	0,10	4,60	0,10	4,90	0,10

Cable type code legend:

9000:

Industry Designator: MISC
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVDF
 Insul. Wall Designator: MIX



Crimp Information Sheet

Terminal Part Number: 15304730
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 9003
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,92 - 2,06
 Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,50 / 15366066		1,99	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

9003:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PVDF
 Insul. Wall Designator: MIX

