

Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,85 - 2,40
 Seal(s): 15366066 | 15366067

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1005 0,80 / 15366066 | | 2,03 | 90 | 1,25 | 0,05 | 2,05 | 0,10 | 4,30 | 0,10 | 5,00 | 0,10 |
| 1005 1,00 / 15366066 | | 2,23 | 120 | 1,40 | 0,05 | 2,10 | 0,10 | 4,60 | 0,10 | 5,00 | 0,10 |
| 1005 1,00 / 15366067 | | 2,23 | 120 | 1,40 | 0,05 | 2,10 | 0,10 | 4,00 | 0,10 | 4,90 | 0,10 |

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1005
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 1,85 - 2,20
 Seal(s): 15366066

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1005 0,80 / 15366066 | | 2,03 | 90 | 1,25 | 0,05 | 2,05 | 0,10 | 4,30 | 0,10 | 5,00 | 0,10 |

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1007
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,20 - 2,70
 Seal(s): 15366067 | 15366066

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1007 0,80 / 15366066 | | 2,33 | 90 | 1,25 | 0,05 | 2,05 | 0,10 | 4,40 | 0,10 | 5,10 | 0,10 |
| 1007 1,00 / 15366067 | | 2,58 | 120 | 1,40 | 0,05 | 2,10 | 0,10 | 4,60 | 0,10 | 5,00 | 0,10 |

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1007
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 2,20 - 2,70
 Seal(s): 15366066 | 15366067

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1007 0,80 / 15366066 | | 2,33 | 90 | 1,25 | 0,05 | 2,05 | 0,10 | 4,40 | 0,10 | 5,10 | 0,10 |
| 1007 1,00 / 15366067 | | 2,58 | 120 | 1,40 | 0,05 | 2,10 | 0,10 | 4,60 | 0,10 | 5,00 | 0,10 |

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1009
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,50 - 3,43
 Seal(s): 15366067

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1009 0,80 / 15366067 | | 2,78 | 90 | 1,25 | 0,05 | 2,05 | 0,10 | 4,40 | 0,10 | 4,90 | 0,10 |
| 1009 1,00 / 15366067 | | 3,17 | 120 | 1,40 | 0,05 | 2,10 | 0,10 | 4,80 | 0,10 | 4,90 | 0,10 |

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1009
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 2,50 - 3,05
 Seal(s): 15366067

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1009 0,80 / 15366067 | | 2,78 | 90 | 1,25 | 0,05 | 2,05 | 0,10 | 4,40 | 0,10 | 4,90 | 0,10 |

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1019
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,70 - 1,90
 Seal(s): 15366065

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1019 0,80 / 15366065 | | 1,80 | 90 | 1,25 | 0,05 | 2,05 | 0,10 | 4,30 | 0,10 | 4,90 | 0,10 |

Cable type code legend:

1019:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: THIN SPECIAL



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1069
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,09 - 2,25
 Seal(s): 12191222

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1069 1,00 / 12191222 | | 2,17 | 120 | 1,35 | 0,05 | 2,10 | 0,10 | 4,10 | 0,10 | 5,00 | 0,10 |

Cable type code legend:

1069:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: ETFE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1094
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,90 - 3,15
 Seal(s): 15366067

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1094 1,00 / 15366067 | | 3,03 | 120 | 1,40 | 0,05 | 2,10 | 0,10 | 4,80 | 0,10 | 4,90 | 0,10 |

Cable type code legend:

1094:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: HEAVY DUTY



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,75 | 1,00 | 1,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,60 - 2,40
 Seal(s): 15366066 | 15324985 | 12191233 | 15366065

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2010 0,75 / 12191233 | | 1,75 | 120 | 1,25 | 0,05 | 2,10 | 0,10 | 4,60 | 0,10 | 4,65 | 0,10 |
| 2010 0,75 / 15366065 | | 1,75 | 120 | 1,25 | 0,05 | 2,10 | 0,10 | 4,60 | 0,10 | 4,60 | 0,10 |
| 2010 0,75 / 15324985 | | 1,75 | 120 | 1,25 | 0,05 | 2,10 | 0,10 | 4,15 | 0,10 | 4,60 | 0,10 |
| 2010 1,00 / 15366066 | | 1,95 | 160 | 1,40 | 0,05 | 2,10 | 0,10 | 4,70 | 0,10 | 4,65 | 0,10 |
| 2010 1,00 / 15324985 | | 1,95 | 160 | 1,40 | 0,05 | 2,10 | 0,10 | 4,35 | 0,10 | 4,65 | 0,10 |
| 2010 1,00 / 12191233 | | 1,95 | 160 | 1,40 | 0,05 | 2,10 | 0,10 | 4,70 | 0,10 | 4,70 | 0,10 |
| 2010 1,00 / 15366065 | | 1,95 | 160 | 1,40 | 0,05 | 2,10 | 0,10 | 4,70 | 0,10 | 4,65 | 0,10 |
| 2010 1,50 / 15366066 | | 2,20 | 150 | 1,55 | 0,05 | 2,10 | 0,10 | 4,70 | 0,10 | 5,00 | 0,10 |

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

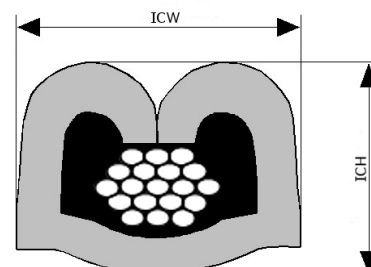

Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,75 | 1,00



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2011
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,05 - 2,70
 Seal(s): 15366067 | 15366066

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2011 0,75 / 15366066 | | 2,28 | 85 | 1,25 | 0,05 | 2,05 | 0,10 | 4,40 | 0,10 | 5,00 | 0,10 |
| 2011 1,00 / 15366067 | | 2,54 | 120 | 1,35 | 0,05 | 2,10 | 0,10 | 4,40 | 0,10 | 4,90 | 0,10 |

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: P/EST, PE, PVC, XLPE
 Insul. Wall Designator: REGULAR

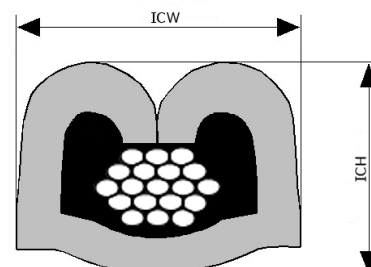

Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,75


*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2017
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,60 - 1,90
 Seal(s): 12191232

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2017 0,75 / 12191232 | | 1,75 | 170 | 1,25 | 0,05 | 2,20 | 0,10 | 4,45 | 0,10 | 4,55 | 0,10 |

Cable type code legend:

2017: FLR41X-B, FLRY-A
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PA, PP, PVC, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,75



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2019
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,50 - 1,90
 Seal(s): 15366065

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2019 0,75 / 15366065 | | 1,70 | 85 | 1,25 | 0,05 | 2,20 | 0,10 | 4,45 | 0,10 | 4,55 | 0,10 |

Cable type code legend:

2019: FL7Y 179, FLR7Y, FLR7Y-A, FLR7Y-B, FLU7Y
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: ETFE
 Insul. Wall Designator: THIN

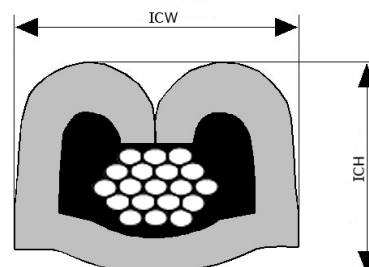

Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,75

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2050
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,20 - 2,50
 Seal(s): 15366066

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2050 0,75 / 15366066 | | 2,35 | 85 | 1,25 | 0,05 | 2,10 | 0,10 | 4,60 | 0,10 | 5,00 | 0,10 |

Cable type code legend:

2050:

Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: EVA
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,75 | 1,00



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2053
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,60 - 1,95
 Seal(s): 15366065 | 15366066

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2053 0,75 / 15366065 | | 1,70 | 120 | 1,30 | 0,05 | 2,10 | 0,10 | 4,50 | 0,10 | 4,60 | 0,10 |
| 2053 1,00 / 15366066 | | 1,85 | 160 | 1,40 | 0,05 | 2,10 | 0,10 | 4,60 | 0,10 | 4,65 | 0,10 |

Cable type code legend:

2053: PSA T2 ZH ID, PSA T3 ZH ID, PSA T4 ZH ID
 Industry Designator: PSA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: POLYOLEFIN, X-POLY
 Insul. Wall Designator: ID

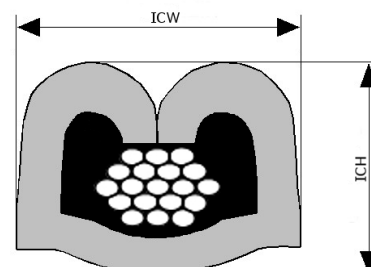

Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,60 | 0,75 | 1,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2054
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,70 - 2,15
 Seal(s): 15366066 | 15366065

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2054 0,60 / 15366065 | | 1,83 | 90 | 1,25 | 0,05 | 2,10 | 0,10 | 4,40 | 0,10 | 4,60 | 0,10 |
| 2054 0,75 / 15366065 | | 1,80 | 120 | 1,30 | 0,05 | 2,10 | 0,10 | 4,50 | 0,10 | 4,60 | 0,10 |
| 2054 1,00 / 15366066 | | 2,07 | 160 | 1,40 | 0,05 | 2,10 | 0,10 | 4,60 | 0,10 | 4,65 | 0,10 |

Cable type code legend:

2054: PSA T2 IR, PSA T3 IR, PSA T3 ZH IR, PSA T4 LH IR
 Industry Designator: PSA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: POLYOLEFIN, PVC, X-POLY
 Insul. Wall Designator: IR



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,75 | 1,00



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2055
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,60 - 2,10
 Seal(s): 12191233

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2055 0,75 / 12191233 | | 1,70 | 120 | 1,25 | 0,05 | 2,10 | 0,10 | 4,30 | 0,10 | 4,60 | 0,10 |
| 2055 1,00 / 12191233 | | 1,93 | 160 | 1,40 | 0,05 | 2,10 | 0,10 | 4,50 | 0,10 | 4,60 | 0,10 |

Cable type code legend:

2055: AGP0119, RENAULT F3Z
 Industry Designator: NRA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: POLYOLEFIN
 Insul. Wall Designator: THIN

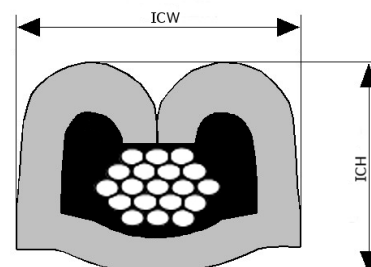

Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,85



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 3003
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,70 - 1,90
 Seal(s): 15366066

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 3003 0,85 / 15366066 | | 1,80 | 95 | 1,30 | 0,05 | 2,10 | 0,10 | 4,30 | 0,10 | 4,90 | 0,10 |

Cable type code legend:

3003: AVSS
 Industry Designator: JIS/JA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, X-PVC
 Insul. Wall Designator: THIN

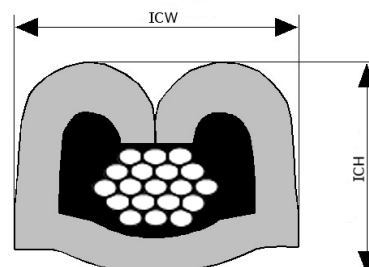

Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,85 | 1,25



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 3004
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,70 - 2,20
 Seal(s): 15366065 | 15366066

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 3004 0,85 / 15366065 | | 1,80 | 90 | 1,30 | 0,05 | 2,05 | 0,10 | 4,50 | 0,10 | 5,00 | 0,10 |
| 3004 1,25 / 15366066 | | 2,10 | 135 | 1,45 | 0,05 | 2,10 | 0,10 | 4,50 | 0,10 | 5,00 | 0,10 |

Cable type code legend:

3004: AVSS
 Industry Designator: JIS/JA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE, X-PVC
 Insul. Wall Designator: THIN

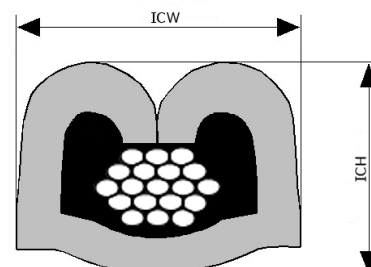

Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 5002
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,10 - 2,18
 Seal(s): 12191222

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 5002 1,00 / 12191222 | | 2,14 | 120 | 1,35 | 0,05 | 2,10 | 0,10 | 4,10 | 0,10 | 5,00 | 0,10 |

Cable type code legend:

5002:

Industry Designator: UL
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: ETFE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,75 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 8000
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,70 - 2,10
 Seal(s): 15366065 | 15366066

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 8000 0,75 / 15366065 | | 1,80 | 85 | 1,25 | 0,05 | 2,05 | 0,10 | 4,30 | 0,10 | 4,90 | 0,10 |
| 8000 1,00 / 15366066 | | 2,00 | 120 | 1,35 | 0,05 | 2,10 | 0,10 | 4,40 | 0,10 | 4,90 | 0,10 |

Cable type code legend:

8000:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: SYNTHRESIN
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15304731
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 9001
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,15 - 2,31
 Seal(s): 15366066

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 9001 0,80 / 15366066 | | 2,23 | 90 | 1,25 | 0,05 | 2,05 | 0,10 | 4,40 | 0,10 | 5,10 | 0,10 |

Cable type code legend:

9001:

Industry Designator: MISC
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVDF
 Insul. Wall Designator: MIX

