

# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 2,00 | 3,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*



Cable Type codes: 1005  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,45 - 3,25  
 Seal(s): 15366067 | 15336674

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 2,00 / 15366067		2,58	200	1,70	0,05	2,60	0,10	4,40	0,10	4,80	0,10
1005 3,00 / 15336674		3,13	250	2,10	0,05	2,65	0,10	4,40	0,10	4,90	0,10

Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN

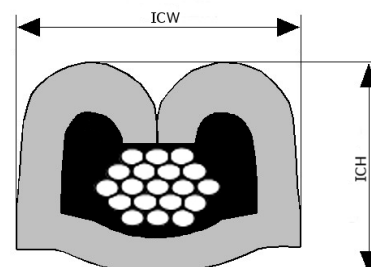

# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 2,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1005  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 2,45 - 2,70  
 Seal(s): 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 2,00 / 15366067		2,58	200	1,70	0,05	2,60	0,10	4,40	0,10	4,80	0,10

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 2,00 | 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1007  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,85 - 3,81  
 Seal(s): 15366067 | 12191235

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 2,00 / 15366067		2,98	200	1,70	0,05	2,60	0,10	4,40	0,10	4,80	0,10
1007 3,00 / 12191235		3,63	250	2,10	0,05	2,65	0,10	5,00	0,10	5,00	0,10

Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 2,00 | 3,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*



Cable Type codes: 1007  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 2,85 - 3,81  
 Seal(s): 12191235 | 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 2,00 / 15366067		2,98	200	1,70	0,05	2,60	0,10	4,40	0,10	4,80	0,10
1007 3,00 / 12191235		3,63	250	2,10	0,05	2,65	0,10	5,00	0,10	5,00	0,10

Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR

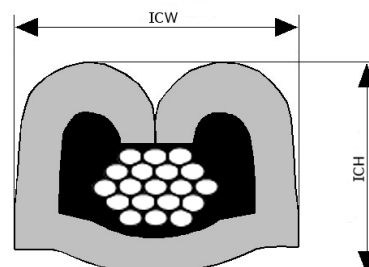

# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 2,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1009  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 3,50 - 3,95  
 Seal(s): 12191235

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 2,00 / 12191235		3,73	200	1,70	0,05	2,60	0,10	4,70	0,10	4,80	0,10

## Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL



# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 1064  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 3,00 - 3,25  
 Seal(s): 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1064 3,00 / 15366067		3,13	250	2,10	0,05	2,65	0,10	5,00	0,10	4,90	0,10

## Cable type code legend:

1064:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: FLUORPOLYM  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 1,50 | 2,00 | 2,50 | 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2010  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,00 - 3,40  
 Seal(s): 12191234 | 15366067 | 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 1,50 / 12191234		2,20	200	1,60	0,05	2,60	0,10	4,50	0,10	5,00	0,10
2010 1,50 / 15366067		2,20	200	1,60	0,05	2,60	0,10	4,45	0,10	4,95	0,10
2010 1,50 / 15366066		2,20	200	1,60	0,05	2,60	0,10	4,70	0,10	4,90	0,10
2010 2,00 / 12191234		2,46	230	1,70	0,05	2,60	0,10	4,60	0,10	5,00	0,10
2010 2,50 / 12191234		2,80	250	1,90	0,05	2,60	0,10	4,70	0,10	5,10	0,10
2010 2,50 / 15366067		2,80	250	1,90	0,05	2,60	0,10	4,80	0,10	5,00	0,10
2010 3,00 / 12191234		3,10	300	2,05	0,05	2,60	0,10	4,80	0,10	5,10	0,10

## Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

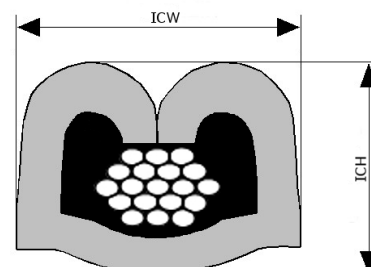

# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 4,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2010  
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED  
 Insulation Range  $\Phi$ [mm]: 3,20 - 3,70  
 Seal(s): 12191235

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 4,00 / 12191235		3,45	265	2,00	0,05	2,85	0,10	5,20	0,10	4,75	0,10

## Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

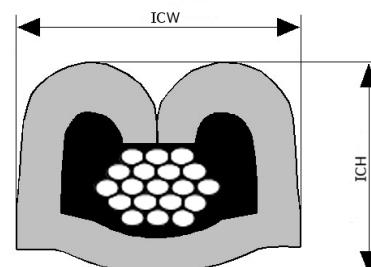



# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 2,00 | 2,50 | 3,00



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2011  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 3,00 - 4,10  
 Seal(s): 12191235 | 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 2,00 / 15366067		3,20	180	1,70	0,05	2,60	0,10	4,30	0,10	4,90	0,10
2011 2,50 / 12191235		3,45	210	1,85	0,05	2,65	0,10	4,40	0,10	5,00	0,10
2011 3,00 / 12191235		3,78	240	1,95	0,05	2,60	0,10	5,10	0,10	5,00	0,10

## Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: P/EST, PE, PVC, XLPE  
 Insul. Wall Designator: REGULAR

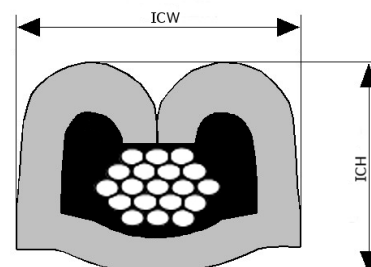

# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 2,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2013  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,50 - 2,80  
 Seal(s): 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2013 2,00 / 15366067		2,65	180	1,70	0,05	2,60	0,10	4,60	0,10	4,90	0,10

## Cable type code legend:

2013:

Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PUR, PVC, SYNTHRESIN, XLPE, XLPE/PVDF  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 1,50 | 2,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2017  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,00 - 3,00  
 Seal(s): 12191233 | 12191234

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 1,50 / 12191233		2,20	309	1,50	0,05	2,80	0,10	4,70	0,10	4,60	0,10
2017 2,50 / 12191234		2,80	398	1,70	0,05	2,85	0,10	4,70	0,10	4,60	0,10

## Cable type code legend:

2017: FLR41X-B, FLRY-A  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PA, PP, PVC, XLPE  
 Insul. Wall Designator: THIN

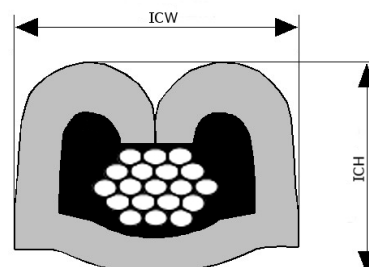

# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 2,00 | 2,50 | 3,00



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2053  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,30 - 3,20  
 Seal(s): 15366066 | 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2053 2,00 / 15366066		2,40	230	1,70	0,05	2,60	0,10	4,90	0,10	5,00	0,10
2053 2,50 / 15366067		2,80	250	1,85	0,05	2,60	0,10	5,00	0,10	5,00	0,10
2053 3,00 / 15366067		3,10	300	2,00	0,05	2,65	0,10	5,10	0,10	5,00	0,10

## Cable type code legend:

2053: PSA T2 ZH ID, PSA T3 ZH ID, PSA T4 ZH ID  
 Industry Designator: PSA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: POLYOLEFIN, X-POLY  
 Insul. Wall Designator: ID

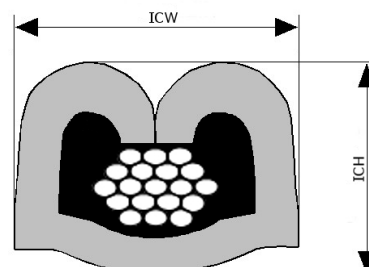

# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 2,00 | 2,50 | 3,00


*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2054  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,50 - 3,45  
 Seal(s): 15366066 | 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2054 2,00 / 15366066		2,65	230	1,70	0,05	2,60	0,10	4,90	0,10	5,00	0,10
2054 2,50 / 15366067		2,83	250	1,85	0,05	2,60	0,10	5,00	0,10	5,00	0,10
2054 3,00 / 15366067		3,35	300	2,00	0,05	2,65	0,10	5,10	0,10	5,00	0,10

## Cable type code legend:

2054: PSA T2 IR, PSA T3 IR, PSA T3 ZH IR, PSA T4 LH IR  
 Industry Designator: PSA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: POLYOLEFIN, PVC, X-POLY  
 Insul. Wall Designator: IR



# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 2,00 | 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 3002  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 3,00 - 3,80  
 Seal(s): 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3002 2,00 / 15366067		3,20	180	1,70	0,05	2,60	0,10	4,70	0,10	5,00	0,10
3002 3,00 / 15366067		3,60	240	2,10	0,05	2,65	0,10	5,20	0,10	5,10	0,10

Cable type code legend:

3002:

Industry Designator: JIS/JA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPVC  
 Insul. Wall Designator: REGULAR



# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 2,00



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 3003  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,50 - 2,80  
 Seal(s): 12191234 | 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3003 2,00 / 12191234		2,65	180	1,70	0,05	2,60	0,10	4,40	0,10	4,90	0,10
3003 2,00 / 15366066		2,65	180	1,70	0,05	2,60	0,10	4,80	0,10	5,00	0,10

## Cable type code legend:

3003: AVSS  
 Industry Designator: JIS/JA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, X-PVC  
 Insul. Wall Designator: THIN

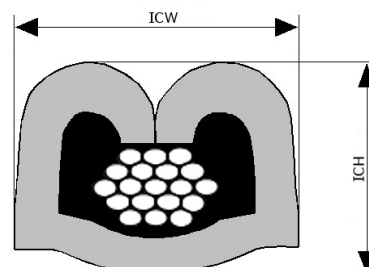

# Crimp Information Sheet

Terminal Part Number: 15304732  
 Surface Plating: SN  
 Material Thickness [mm]: 0,30  
 Cross Section [mm<sup>2</sup>]: 2,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 3004  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,50 - 2,70  
 Seal(s): 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 2,00 / 15366067		2,60	180	1,70	0,05	2,60	0,10	4,60	0,10	4,90	0,10

## Cable type code legend:

3004: AVSS  
 Industry Designator: JIS/JA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE, X-PVC  
 Insul. Wall Designator: THIN

