




DERATING CURVE

Cable range: 0.35 - 2.0 mm²
Crimp method: Standard
Contact plating: Sn
Test method: Single circuit
in free air*
Mated to: SICMA
Male Tab

* For reference only

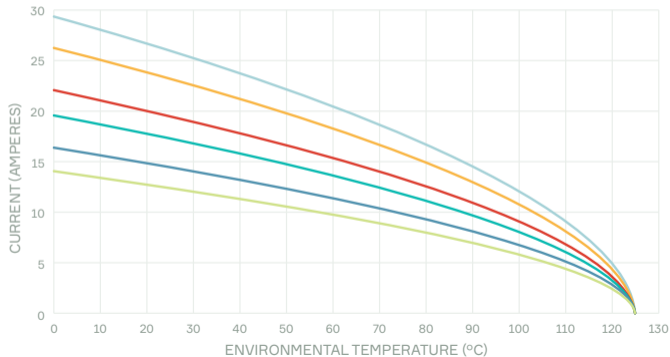

0.35 mm² 1.0 mm²
0.50 mm² 1.5 mm²
0.75 mm² 2.0 mm²

The test data was collected from single circuits in a draft free enclosure. This model does not account for all of the variables that would be present in an actual application.

For additional detailed product performance, visit our website at aptiv.com