




GENERAL TOLERANCE											
	10 MAX	50 MAX	100 MAX	250 MAX	250 OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±0.2	±0.3	±0.5	±2.5	±3°	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4					±3°	0.1
C	±0.3	±0.5	±0.8	±1.4	±2					±3°	0.15

PART NO. AND CH. CODE	W1	H1	W2	H2	L	APPLICABLE WIRE SIZE
7114-7386-02	2.60	(2.35)	3.70	(2.90)	9.00	△ CIVUS 0.35sq~CAVS 0.50sq
7114-7387-02	3.15	(2.90)	4.20	(3.50)	9.00	△ CIVUS 0.75sq~CAVS 1.25sq AVS 0.85sq, ALVUS 0.75sq~1.00sq
7114-7388-02	4.20	(3.30)	4.50	(3.75)	9.90	△ AVSS 2.00sq ALVUS 1.50sq~ALVSS 2.50sq
7114-7531-02	1.70	(1.80)	2.35	(2.45)	9.00	△ CIVUS 0.13sq~CHFUS 0.22sq

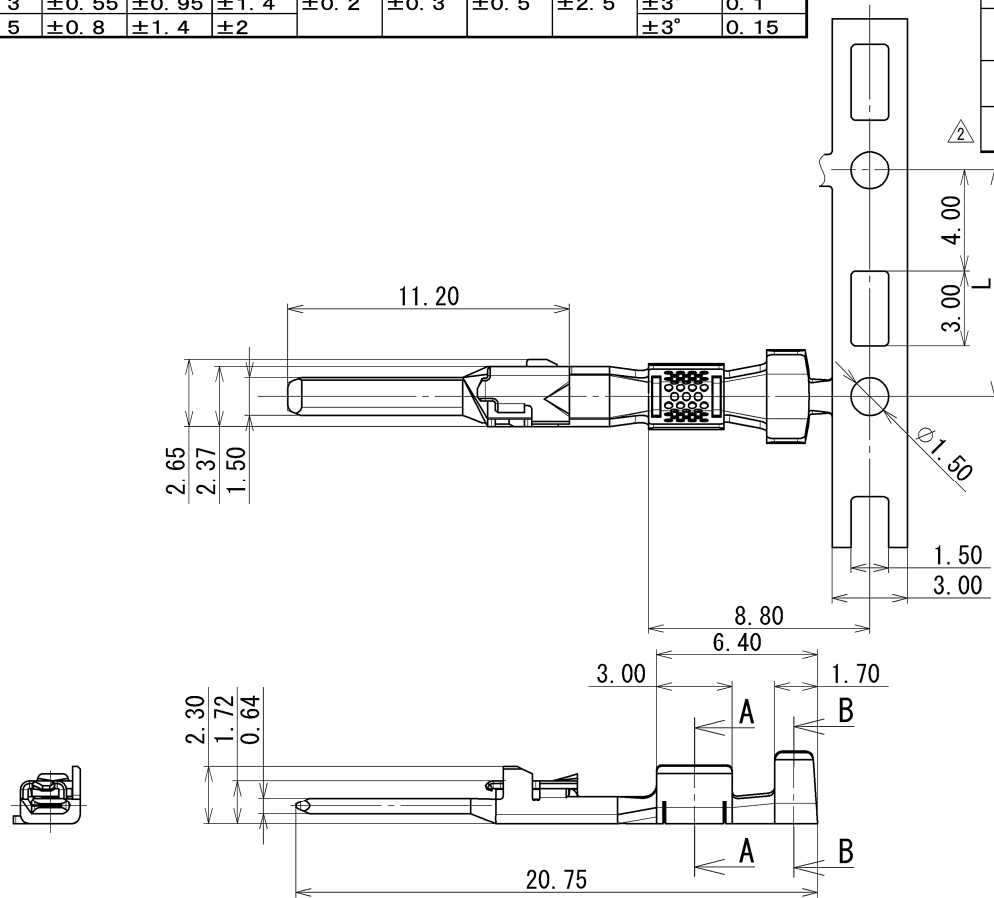

注記
 1. 相手端子番号 : 7116-7389-02 ETC.
 2. 適用電線サイズ : 表参照
 △ 3. 2.5sq加締め部を樹脂で覆う場合は適用外とする。

NOTES
 1. FEMALE COUNTERPART NO. : 7116-7389-02 ETC.
 2. APPLICABLE WIRE SIZE : SEE TABLE
 △ 3. NOT APPLICABLE IF CRIMPED PART WITH 2.5sq WIRE IS COVERED WITH RESIN.

△	2017/03/22	CHANGED APPLICABLE WIRE SIZE ETC.	C17-P067	Y. H
△	2016/07/27	ADDED APPLICABLE WIRE SIZE	C16-P319	T. M
△	2013/01/31	DELETED PART NO. ETC.	C13-Z051	E. O
△	2012/12/07	ADDED PART NO. ETC.	C12-Z942	E. O
△	2012/05/25	CHANGED APPLICABLE WIRE SIZE ETC.	C12-Z463	J. C
	2011/12/20	NEW	C11-Z712	T. F
LET	DATE	REVISION RECORD	NO.	CHKD

CUSTOMER		MATERIAL SPEC.		BRASS (t=0.3) TIN PLATING		TREAT. & FIN.	
CUSTOMER PART NO.		CUSTOMER DWG NO.		NAME 060 TERMINAL MALE			
OFFICE		TRIAL PART NO.		VENDOR			
VENDOR NO.		DWG TYPE		DWG SOURCE		DWG DATE	
R		NEW		2011/12/20		UNIT mm	
APPROVED		CHECKED		CHECKED		DESIGN	
T. MATSUNAGA				K. MATSUMURA		Y. HANAI	
2017/03/22				2011/09/11		2017/03/22	

PART NO. CH. CODE		7114-7386-02 ETC.	
DWG NO.		7114-7386-02:R	
SET DWG NO.			
YAZAKI CORPORATION			