
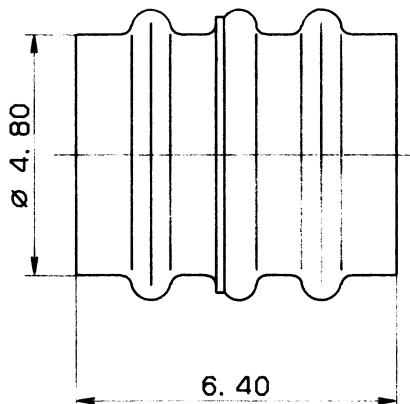


1

2

3

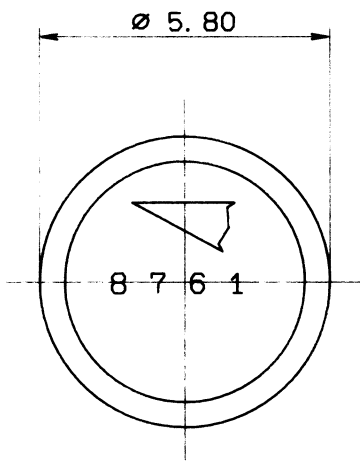

RUBBER PART GENERAL TOLERANCE			
PART DIM.	1	2	③
0 TO 3	± 0.2	± 0.3	± 0.4
3 TO 6	± 0.2	± 0.4	± 0.5
6 TO 10	± 0.3	± 0.5	± 0.6
10 TO 18	± 0.3	± 0.6	± 0.8
18 TO 30	± 0.4	± 0.8	± 1.0
30 TO 50	± 0.5	± 1.0	± 1.5
50 TO 80	± 0.6	± 1.2	± 2.0
80 TO 120	± 0.7	± 1.4	± 2.5
120 TO 180	± 0.8	± 1.6	± 3.0
180 TO 250	± 1.0	± 2.0	± 4.0
250 TO 315	± 1.2	± 2.5	± 5.0
315 TO 400	± 1.5	± 3.0	± 6.0
400 TO 500	± 1.8	± 3.5	± 7.0
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %

注記

- 1. 金庫シリコンゴム
- 色:ベンガラ色

NOTE

- 1. SELF-LUBRICATING SILICONE RUBBER
- COLOR: RED-IRON

ISSUE MARK

91.10.04		NEW		C91-L764		K. S		OFFICE		TRIAL PART NO.		MATERIAL SPEC. SEE NOTE		TREAT. & FIN.	
LET	DATE	REVISION RECORD		NO.	CHKD	VENDOR		VENDOR NO.		NAME		090 SEALED CONNECTOR			
		GENERAL TOLERANCE								PLUGGING RUBBER STOPPER					
	10MAX	50MAX	100MAX	250MAX	250OVR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	7157-8761
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	91.10.04	mm	10/1	3	DWG NO.	7157-8761:R
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	YAZAKI CORPORATION		
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15			ISHIZUKA					
SPECIFIED				MASS		g				91.10.04					

1

2

3