


1

2

3

RUBBER PART GENERAL TOLERANCE			
PART DIM.	1	2	③
0 TO 3	± 0.2	± 0.3	± 0.4
3 TO 6	± 0.2	± 0.4	± 0.5
6 TO 10	± 0.3	± 0.5	± 0.6
10 TO 18	± 0.3	± 0.6	± 0.8
18 TO 30	± 0.4	± 0.8	± 1.0
30 TO 50	± 0.5	± 1.0	± 1.5
50 TO 80	± 0.6	± 1.2	± 2.0
80 TO 120	± 0.7	± 1.4	± 2.5
120 TO 180	± 0.8	± 1.6	± 3.0
180 TO 250	± 1.0	± 2.0	± 4.0
250 TO 315	± 1.2	± 2.5	± 5.0
315 TO 400	± 1.5	± 3.0	± 6.0
400 TO 500	± 1.8	± 3.5	± 7.0
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %

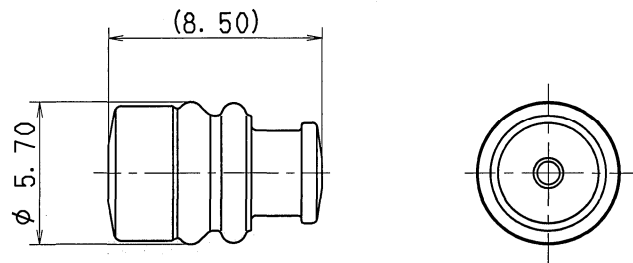

△ 注記

- 取扱説明書No. : YPES-15-221
- 本製品の性能は、JASO D616:2011版(分類2)を満足すること。

△ NOTES

- HANDLING MANUAL NO. : YPES-15-221
- THE PERFORMANCE OF THIS PRODUCT MUST BE IN ACCORDANCE WITH JASO D616:2011th EDITION (CLASSIFICATION 2).

ISSUE MARK


LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR	VENDOR NO.					MATERIAL		TREAT.		
△	13/08/26	CHANGED NOTES	C13-Z316	A. Q	CUSTOMER	CUSTOMER PART NO.					MATL. SILICONE RUBBER		TREAT.		
△	05/01/27	CHANGED NOTE, ETC.	C05-Z155	H. T	CUSTOMER DWG NO.	CUSTOMER DWG NO.					SPEC. (DARK BLUE)		& FIN.		
	95/08/24	NEW	C95-M259	K. O	OFFICE	TRIAL PART NO.					NAME △ 2.3II (090II) 6mm pitch RUBBER				
					VENDOR						STOPPER (S SIZE)				
GENERAL TOLERANCE						DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	△ 7158-3006-90 (7B58-3006-90)		
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	95/08/03	mm	5:1	3	CH. CODE	
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	DWG NO.	7158-3006-90:R	
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	M. FUKUDA	S. SUZUKI	K. KIDA	MAEDA	A. QUIROL	SET DWG NO.		
SPECIFIED						MASS	g	13/08/26	13/08/26	13/08/26	94/09/27	13/08/26	YAZAKI CORPORATION		

1

2

3

RUBBER PART GENERAL TOLERANCE				
PART DIM.	1	2	③	
0 TO 3	± 0.2	± 0.3	± 0.4	
3 TO 6	± 0.2	± 0.4	± 0.5	
6 TO 10	± 0.3	± 0.5	± 0.6	
10 TO 18	± 0.3	± 0.6	± 0.8	
18 TO 30	± 0.4	± 0.8	± 1.0	
30 TO 50	± 0.5	± 1.0	± 1.5	
50 TO 80	± 0.6	± 1.2	± 2.0	
80 TO 120	± 0.7	± 1.4	± 2.5	
120 TO 180	± 0.8	± 1.6	± 3.0	
180 TO 250	± 1.0	± 2.0	± 4.0	
250 TO 315	± 1.2	± 2.5	± 5.0	
315 TO 400	± 1.5	± 3.0	± 6.0	
400 TO 500	± 1.8	± 3.5	± 7.0	
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %	

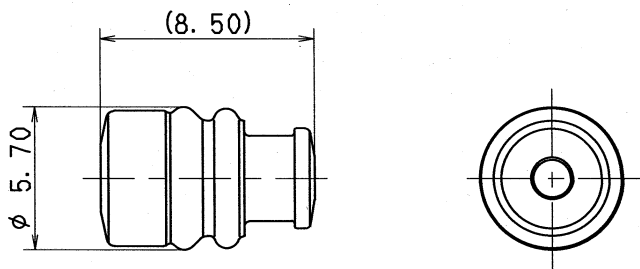

注記

- △ 1. 適用電線サイズ: AVS 0.5~0.85
: AVSS/CAVS 1.25
: CHFUS 1.5 HFSS 1~1.5
- △ 2. () 内品番は、エアバック (A/B) 回路及び特別管理回路に使用する時に適用すること。

NOTES

- △ 1. APPLICABLE WIRE SIZE: AVS 0.5~0.85
: AVSS/CAVS 1.25
: CHFUS 1.5 HFSS 1~1.5
- △ 2. () PART NO. IS USED FOR PARTS ASSOCIATED WITH A/B CIRCUITS OR OTHER SPECIFIED CIRCUIT.

△	05/01/27	CHANGED NOTE, ETC.	C05-Z155	H. T	CUSTOMER				MATL. SILICONE RUBBER				TREAT.		
△	04/04/08	CHANGED NOTE, NAME & ADDED NOTE, A/B PART NO.	C04-X219	H. T	CUSTOMER PART NO.				CUSTOMER DWG NO.				SPEC. (DARK GRAY) & FIN.		
	95/08/24	NEW	C95-M259	K. O	OFFICE				TRIAL PART NO.				NAME △ 2.3II (090II) 6mm pitch RUBBER		
LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR				VENDOR NO.				STOPPER (M SIZE)		
GENERAL TOLERANCE					DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	△ 7158-3007-10 (7B58-3007-10)			
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT				CH. CODE	DWG NO. 7158-3007-10:R SET DWG NO.			
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	95/08/03	mm	5:1	3		
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN			
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15				MAEDA	A. PACABIS			
SPECIFIED					MASS								YAZAKI CORPORATION		
					g		'05.01.28				94/09/27	05/01/27			





1

2

3

RUBBER PART GENERAL TOLERANCE				
PART DIM.	1	2	③	
0 TO 3	± 0.2	± 0.3	± 0.4	
3 TO 6	± 0.2	± 0.4	± 0.5	
6 TO 10	± 0.3	± 0.5	± 0.6	
10 TO 18	± 0.3	± 0.6	± 0.8	
18 TO 30	± 0.4	± 0.8	± 1.0	
30 TO 50	± 0.5	± 1.0	± 1.5	
50 TO 80	± 0.6	± 1.2	± 2.0	
80 TO 120	± 0.7	± 1.4	± 2.5	
120 TO 180	± 0.8	± 1.6	± 3.0	
180 TO 250	± 1.0	± 2.0	± 4.0	
250 TO 315	± 1.2	± 2.5	± 5.0	
315 TO 400	± 1.5	± 3.0	± 6.0	
400 TO 500	± 1.8	± 3.5	± 7.0	
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %	



注記

- △ 1. 適用電線サイズ: AVSS 2
: AVS 1.25~2
: HFSS 2
- △ 2. () 内品番は、エアバック (A/B) 回路及び特別管理回路に使用する時に適用すること。

NOTES

- △ 1. APPLICABLE WIRE SIZE: AVSS 2
: AVS 1.25~2
: HFSS 2
- △ 2. () PART NO. IS USED FOR PARTS ASSOCIATED WITH A/B CIRCUITS OR OTHER SPECIFIED CIRCUIT.

ISSUE MARK

△ 05/01/27 CHANGED NOTE, ETC. C05-Z155 H. T		CUSTOMER		MATERIAL SILICONE RUBBER TREAT. & FIN.											
△ 96/08/02 ADDED A/B PART NO. C96-M438 A. Y		CUSTOMER PART NO.		SPEC. (DARK BROWN)											
95/08/24 C95-M259 K. O		OFFICE		NAME △ 2.3II (090II) 6mm pitch RUBBER											
LET DATE REVISION RECORD NO. CHKD		VENDOR		STOPPER (L SIZE)											
GENERAL TOLERANCE		VENDOR NO.		PART NO. 7158-3008-80 (7B58-3008-80)											
10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	CH. CODE	SET DWG NO.	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	95/08/03	mm	5:1	3		
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	DWG NO. 7158-3008-80:R		
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15				MAEDA	A. PACABIS			
SPECIFIED		MASS		g		25.01.28						94/09/27		05/01/27	
													YAZAKI CORPORATION		

1

2

3