

TABLE 1

| SUB ASSEMBLY PART NO. AND CH. CODE | NO. | PART NO. AND CH. CODE | MATERIAL | COLOR | △ QTY. |
|------------------------------------|-----|-----------------------|----------|---------------|--------|
| 7282-1130 ETC. | ① | △ SEE TABLE 2 | △ HPA | △ SEE TABLE 2 | 1 |
| | ② | 7157-4028 | △ HPA | NATURAL | 1 |

△ TABLE 2


| SUB ASSEMBLY PART NO. AND CH. CODE | PART NO. AND CH. CODE | COLOR |
|------------------------------------|-----------------------|------------|
| 7282-1130. △ | 7182-1130 | NATURAL |
| 7282-1130-10. △ | 7182-1130-10 | DARK GRAY |
| 7282-1130-30. △ | 7182-1130-30 | BLACK |
| 7282-1130-40. △ | 7182-1130-40 | LIGHT GRAY |
| 7282-1130-50. △ | 7182-1130-50 | ORANGE |
| 7282-1130-90. △ | 7182-1130-90 | BLUE |

NOTES

- MATING PART NO. : 7283-1130 ETC.
- APPLICABLE TERMINAL NO. : 7114-4020 ETC.

注記

- 嵌合相手品番 : 7283-1130 ETC.
- 適用端子品番 : 7114-4020 ETC.

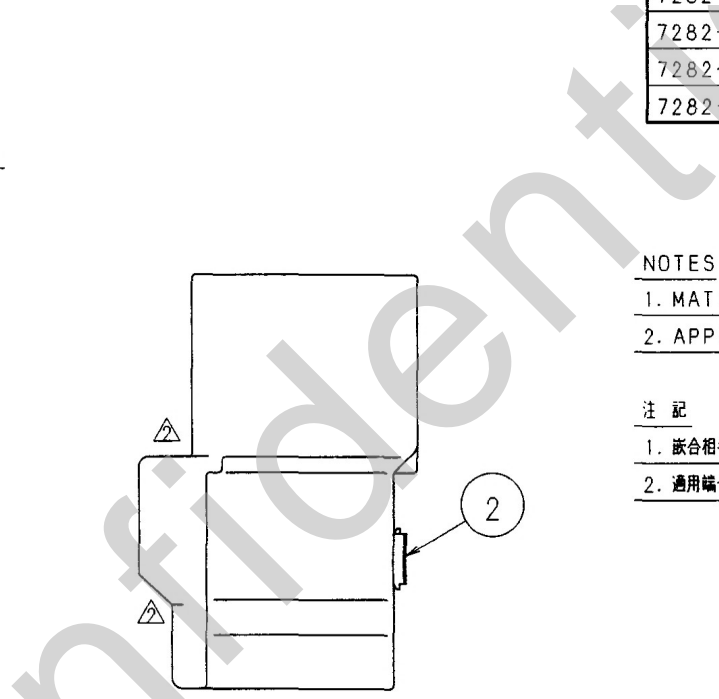

| | | | | |
|---|----------|------------------------------------|----------|------|
| △ | 99.01.20 | ELIMINATED COLOR NO. | C99-L102 | T. M |
| △ | 95.03.20 | CHANGED MATERIAL. △ | C95-L362 | M. K |
| △ | 93.10.30 | CHANGED MATERIAL & ADDED COLOR NO. | C93-P173 | C. M |
| △ | 90.05.22 | CHANGED FORM | C90-L553 | H. Y |
| △ | 89.09.07 | ADDED PART NO. | C89-L960 | M. H |
| △ | 88.12.24 | NEW | C89-L016 | K. J |

| CUSTOMER | | MATERIAL SPEC. | | TREAT. & FIN. | |
|-------------------|------------------|--------------------------|--|---------------|--|
| CUSTOMER PART NO. | CUSTOMER DWG NO. | SEE TABLE 1 | | | |
| OFFICE | TRIAL PART NO. | NAME 090II 13P CONNECTOR | | | |
| VENDOR | | SUB ASSEMBLY MALE | | | |

| GENERAL TOLERANCE | | | | | | | VENDOR NO. | | | | | PART NO. CH. CODE | SET DWG NO. | | |
|-------------------|-------|--------|--------|-------|-------|--------|------------|------------|----------|----------|----------|--------------------|----------------|-------|--|
| 10MAX | 50MAX | 100MAX | 250MAX | 2500V | ANGLE | ECCENT | DWG TYPE | DWG SOURCE | DWG DATE | UNIT | SCL | | | ANGLE | |
| A ±0.15 | ±0.2 | ±0.3 | ±0.5 | ±0.75 | ±30' | 0.1 | R | NEW | 89.01.12 | mm | 2/1 | 3 | 7282-1130 ETC. | | |
| B ±0.2 | ±0.3 | ±0.55 | ±0.95 | ±1.4 | ±30' | 0.1 | APPROVED | CHECKED | CHECKED | DESIGN | DRAWN | | 7282-1130:R | | |
| (C) ±0.3 | ±0.5 | ±0.8 | ±1.4 | ±2 | ±30' | 0.15 | 加藤 | 山梨 | 輪 | Y. DHTA | KANAZAWA | | | | |
| SPECIFIED | | | | | | | 99.01.28 | 99.01.27 | 99.01.26 | 88.03.22 | 99.01.20 | YAZAKI CORPORATION | | | |