
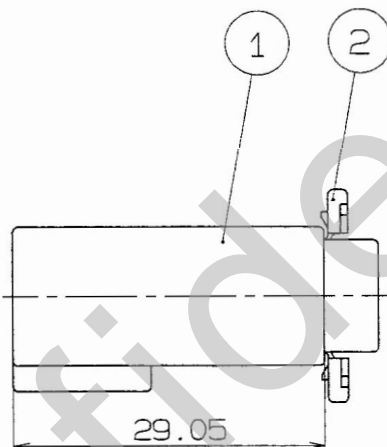
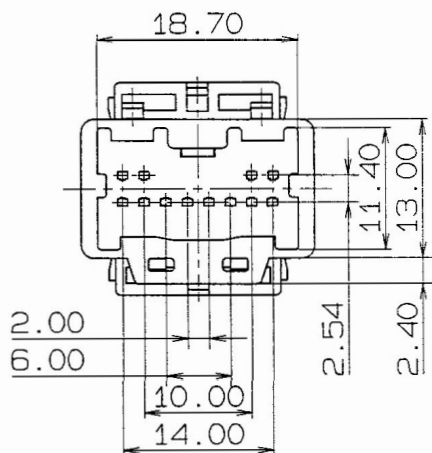


1

2

3

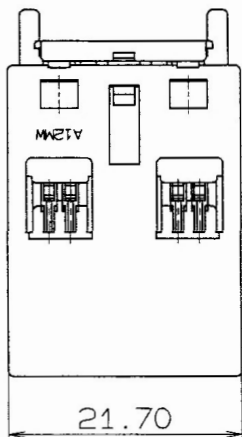

YAZAKI SUB ASSEMBLY PART NO.	NO.	YAZAKI PART NO.	MATERIAL (COLOR)	△ QTY.
△ 7282-4125 (7C82-4125)	①	△ 7182-4125 (7B82-4125)	PBT (NATURAL)	1
	②	△ 7157-6776 (7B57-6776)	△ PBT (NATURAL)	1

注記

- △ 1. 嵌合相手品番: 7283-8625, (7C83-8625)
- △ 2. 適用端子品番: 7114-1670-02 ETC.
- △ 3. ( ) 内品番は、エアバック (A/B) 回路及び特別管理回路に使用する時に適用すること。

NOTES

- △ 1. MATING PART NO.: 7283-8625, (7C83-8625)
- △ 2. APPLICABLE TERMINAL NO.: 7114-1670-02 ETC.
- △ 3. IN THE CASE OF A/B CIRCUITS AND CONTROL CIRCUITS USE PART NO. ( ) .

ISSUE MARK

97.05.19 ADDED A/B PART NO. C97-L713 H.K				CUSTOMER				MATERIAL SPEC. SEE TABLE				TREAT. & FIN.				
94.11.18 CH.REAR HOLDER COLOR C94-M537 O.S				CUSTOMER PART NO.				CUSTOMER DWG NO.				NAME A TYPE CONNECTOR 12P (M)				
- 92.10.26 NEW C92-7075 R.F				OFFICE				TRIAL PART NO.				SUB ASS'Y				
LET DATE REVISION RECORD NO. CHKD				VENDOR				VENDOR NO.								
GENERAL TOLERANCE																
	10MAX	50MAX	100MAX	250MAX	2500V	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	△ 7282-4125 (7C82-4125)	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	92.10.26	mm	2/1	3	CH. CODE		
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO.	7282-4125: R	
◎	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	神田 辻 泰		0.SUGIYAMA	NAKAJIMA			SET DWG NO.		
SPECIFIED							MASS	9	97.05.23	97.05.22	97.5.20	92.10.26	97.05.19	YAZAKI CORPORATION		

1

2

3