



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E2	REVISED	ECR-23-185274	13SEP2023	AG RK

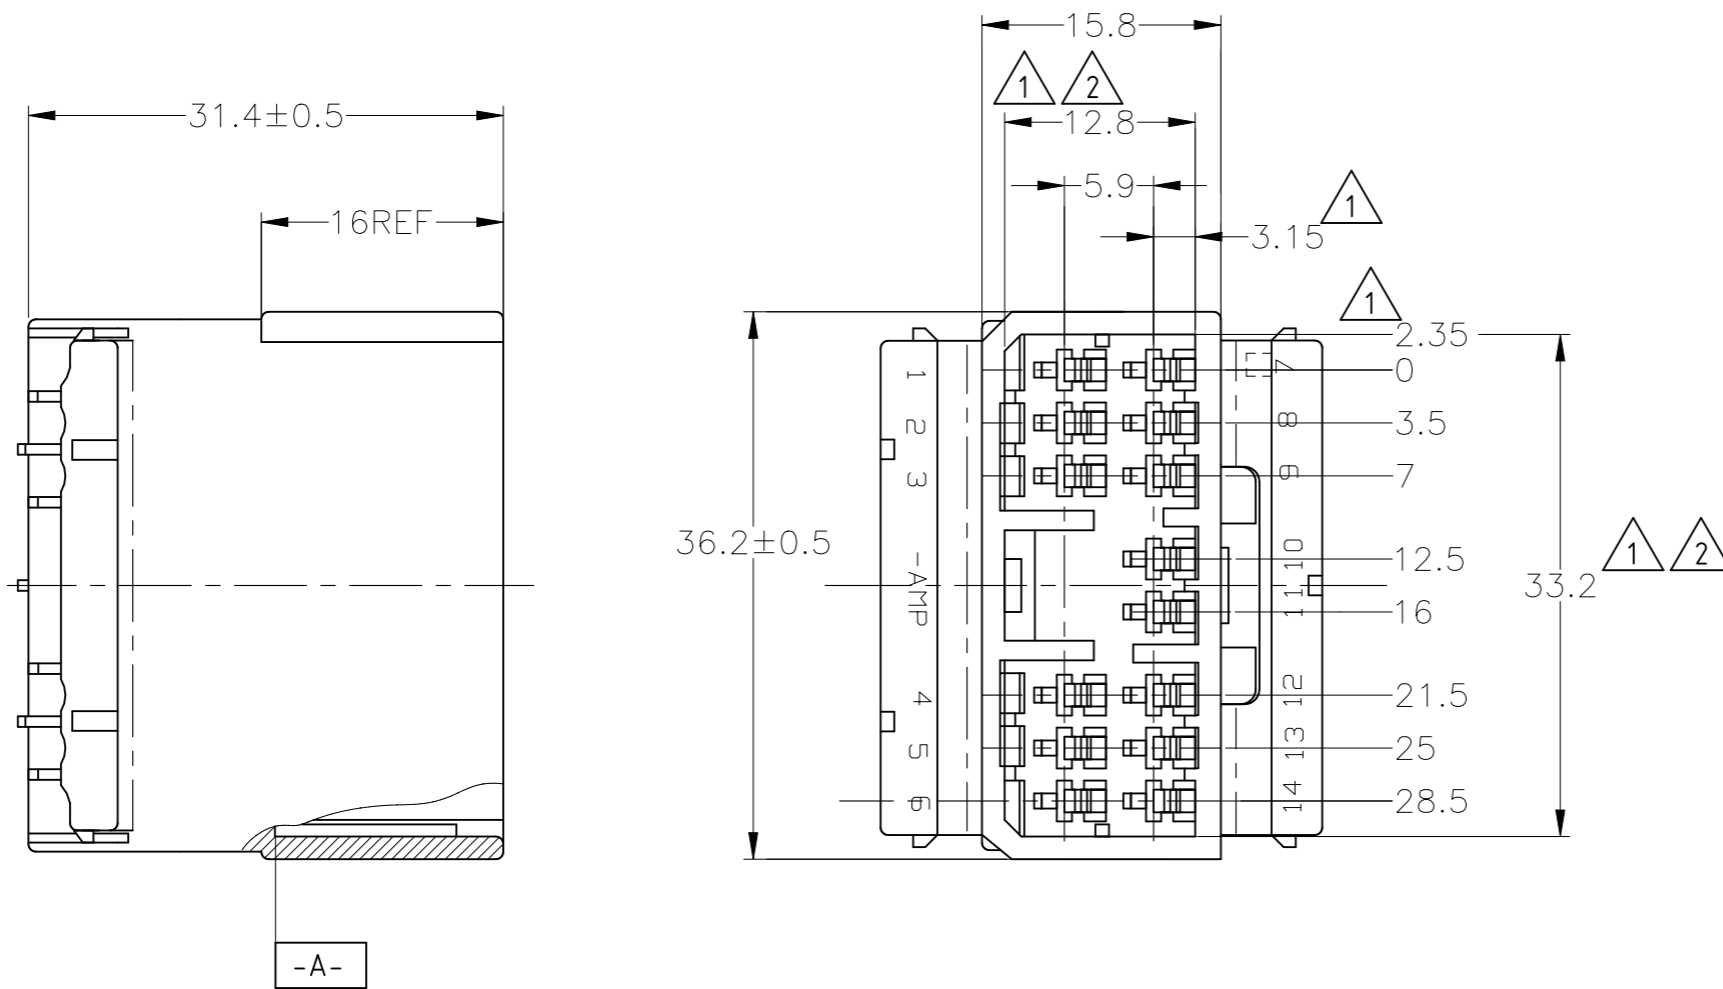

1. MUST BE KEPT BETWEEN **-A-** AND 2
  2. TO BE MATED WITH PLUG HOUSING SMOOTHLY
  3. APPLIED TAB CONTACT; P/N 173633 AND 173645
  4. APPLIED PLUG HOUSING; P/N 173852 etc
- 
1. **-A-** 面より2mmの範囲で測定
  2. 相手ハウジングと所定の機能を満足して嵌合できること
  3. 内装するタブコンタクトは型番173633、173645
  4. 嵌合相手ハウジング型番173852 他

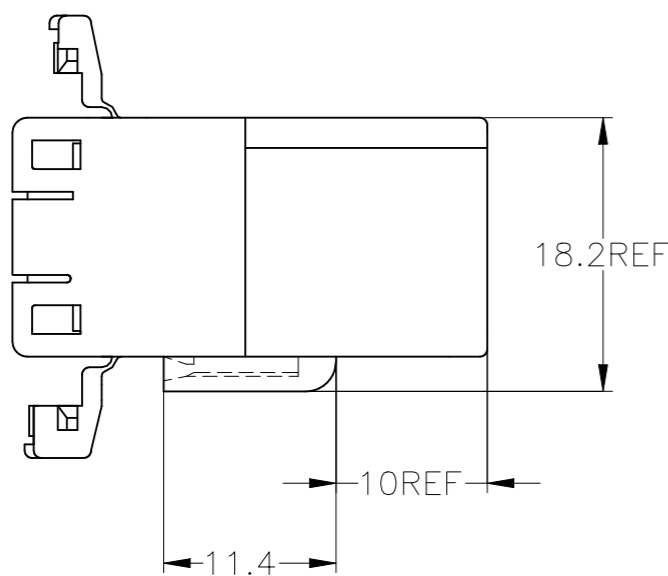

OBSOLETE

V-2	白 (WHITE)	1-174934-1
HB	黄 (YELLOW)	174934-7
	灰 (GRAY)	174934-6
	青 (BLUE)	174934-5
	緑 (GREEN)	174934-4
	黒 (BLACK)	174934-2
	白 (WHITE)	174934-1
使用材料難燃グレード (FLAMMABILITY OF MATERIAL)	色 (COLOR)	型番 (PART NUMBER)

TOLERANCES UNLESS OTHERWISE SPECIFIED:  
一般公差

10 <sub>±</sub>	: ±0.2
30 <sub>±</sub>	> 10 : ±0.25
	> 30 : ±0.3
ANGLE	: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -
FINISH	-

MATERIAL	PBT
----------	-----

DWN	S.FUJITA	08DEC08		TE Connectivity		
CHK	K.BETSUI	08DEC08		NAME		
APVD	K.BETSUI	08DEC08		070 SERIES MULTILOCK I/O CONNECTOR 14POSITION CAP HOUSING WIRE TO WIRE		
PRODUCT SPEC	-	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
APPLICATION SPEC	-	-	0.000000	A300779	C-174934	-
WEIGHT	CUSTOMER DRAWING		SCALE	SHEET	REV	
			2:1	1 OF 1	E2	