

Crimp Information Sheet

Terminal Part Number: 12124977
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,45 - 1,88
 Seal(s): 15324985 | 15324983

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35 / 15324983		1,60	55	1,10	0,05	2,05	0,10	4,40	0,10	4,50	0,10
1005 0,50 / 15324985		1,74	80	1,15	0,05	2,05	0,10	4,40	0,10	4,50	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12124977
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1011
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,65 - 2,90
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1011 0,50 / 15324982		2,78	80	1,15	0,05	2,05	0,10	4,90	0,10	4,50	0,10

Cable type code legend:

1011:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE
 Insul. Wall Designator: HEAVY DUTY



Crimp Information Sheet

Terminal Part Number: 12124977
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1025
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,47 - 1,85
 Seal(s): 15324983 | 15324985

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,35 / 15324983		1,55	55	1,10	0,05	2,05	0,10	4,40	0,10	4,50	0,10
1025 0,50 / 15324985		1,73	80	1,15	0,05	2,05	0,10	4,40	0,10	4,50	0,10

Cable type code legend:

1025:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12124977
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1027
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,30 - 2,60
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1027 0,50 / 15324982		2,45	80	1,15	0,05	2,05	0,10	4,80	0,10	4,50	0,10

Cable type code legend:

1027:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL



Crimp Information Sheet

Terminal Part Number: 12124977
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,35

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1045
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,40 - 1,75
 Seal(s): 15324983

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1045 0,35 / 15324983		1,58	70	1,10	0,05	2,05	0,10	4,40	0,10	4,50	0,10

Cable type code legend:

1045:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: ECTFE, ETFE, PTFE, PUR, TFE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12124977
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,35

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1047
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,40 - 1,75
 Seal(s): 15324983

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1047 0,35 / 15324983		1,58	70	1,10	0,05	2,05	0,10	4,40	0,10	4,50	0,10

Cable type code legend:

1047:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12124977
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,35

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1049
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,45 - 2,70
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1049 0,35 / 15324982		2,58	70	1,10	0,05	2,05	0,10	4,80	0,10	4,50	0,10

Cable type code legend:

1049:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE
 Insul. Wall Designator: HEAVY DUTY



Crimp Information Sheet

Terminal Part Number: 12124977
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,35

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1055
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,45 - 1,75
 Seal(s): 15324983

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1055 0,35 / 15324983		1,60	70	1,10	0,05	2,05	0,10	4,40	0,10	4,50	0,10

Cable type code legend:

1055:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: HDPE, PVC, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12124977
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,20 - 1,70
 Seal(s): 15324985 | 15324983

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,35 / 15324983		1,34	50	1,10	0,05	2,05	0,10	4,30	0,10	4,50	0,10
2010 0,50 / 15324985		1,50	80	1,15	0,05	2,05	0,10	4,40	0,10	4,50	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B

Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12124977
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,30 | 0,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 3004
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,30 - 1,70
 Seal(s): 15324983

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,30 / 15324983		1,40	50	1,10	0,05	2,05	0,10	4,20	0,10	4,50	0,10
3004 0,50 / 15324983		1,60	75	1,15	0,05	2,05	0,10	4,30	0,10	4,50	0,10

Cable type code legend:

3004: AVSS
 Industry Designator: JIS/JA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE, X-PVC
 Insul. Wall Designator: THIN

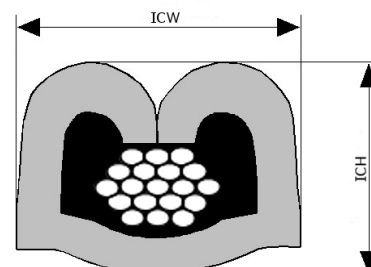

Crimp Information Sheet

Terminal Part Number: 12124977
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 8000
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,40 - 1,60
 Seal(s): 15324985

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 0,50 / 15324985		1,50	80	1,15	0,05	2,05	0,10	4,40	0,10	4,50	0,10

Cable type code legend:

8000:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: SYNTHRESIN
 Insul. Wall Designator: THIN

