

Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,45 - 1,88
 Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35 / 15366021		1,60	55	1,05	0,05	1,80	0,10	3,30	0,10	3,40	0,10
1005 0,50 / 15366021		1,74	80	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1005
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
 Insulation Range Φ [mm]: 1,60 - 1,88
 Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50 / 15366021		1,74	80	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1007
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,30
 Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50 / 15366060		2,15	80	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1025
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,47 - 1,85
 Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,35 / 15366021		1,55	55	1,05	0,05	1,80	0,10	3,30	0,10	3,40	0,10
1025 0,50 / 15366021		1,73	80	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

1025:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1035
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,30
 Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1035 0,50 / 15366060		2,15	80	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

1035:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,35

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1047
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,40 - 1,75
 Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1047 0,35 / 15366021		1,58	70	1,05	0,05	1,80	0,10	3,30	0,10	3,40	0,10

Cable type code legend:

1047:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: THIN

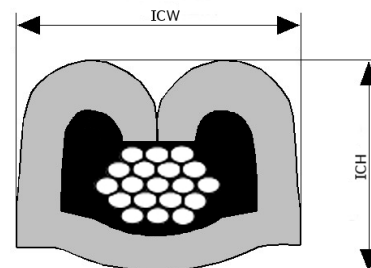

Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,35

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1055
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,45 - 1,75
 Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1055 0,35 / 15366021		1,60	70	1,05	0,05	1,80	0,10	3,30	0,10	3,40	0,10

Cable type code legend:

1055:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: HDPE, PVC, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1092
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,30
 Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1092 0,50 / 15366060		2,15	80	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

1092:

Industry Designator: SAE
 Conductor Material: ALLOY
 Conductor Plating: NONE
 Insul. Material: XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,20 - 1,70
 Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,35 / 15366021		1,34	50	1,15	0,05	1,65	0,10	3,20	0,10	3,15	0,10
2010 0,50 / 15366021		1,50	80	1,25	0,05	1,65	0,10	3,30	0,10	3,15	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B

Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2011
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,30
 Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 0,50 / 15366060		2,15	75	1,15	0,05	1,70	0,10	3,60	0,10	3,20	0,10

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: P/EST, PE, PVC, XLPE
 Insul. Wall Designator: REGULAR

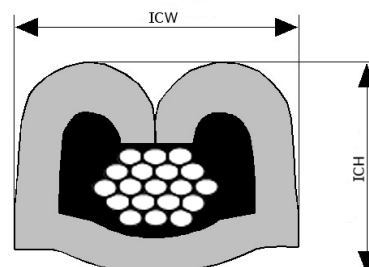

Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2015
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,30
 Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2015 0,50 / 15366060		2,15	80	1,25	0,05	1,65	0,10	3,30	0,10	3,15	0,10

Cable type code legend:

2015: FL2G
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: SIL, SIR
 Insul. Wall Designator: REGULAR

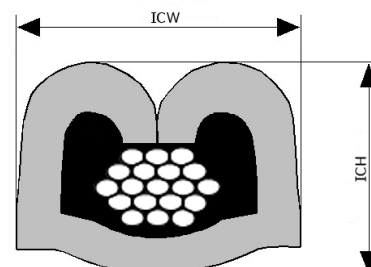

Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,35


*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2017
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,10 - 1,40
 Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,35 / 15366021		1,25	50	1,15	0,05	1,65	0,10	3,20	0,10	3,15	0,10

Cable type code legend:

2017: FLR41X-B, FLRY-A
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PA, PP, PVC, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50


*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2023
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,30
 Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2023 0,50 / 15366060		2,15	80	1,25	0,05	1,65	0,10	3,30	0,10	3,15	0,10

Cable type code legend:

2023: FL2G
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: SIL, SIR
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.*

*For more information, please
 consult your local sales office*

Cable Type codes: 3004
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,50 - 1,70
 Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,50 / 15366021		1,60	75	1,10	0,05	1,80	0,10	3,40	0,10	3,40	0,10

Cable type code legend:

3004: AVSS
 Industry Designator: JIS/JA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE, X-PVC
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 15326264
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 9000
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,90 - 2,05
 Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9000 0,50 / 15366060		1,98	80	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

9000:

Industry Designator: MISC
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVDF
 Insul. Wall Designator: MIX

